

PLUG-IN COMMUNICATIONS MODULE PAC RS485



Similar to image

**General technical details:**

<b>Product designation</b>		expansion module PAC RS485
<b>Mounting type</b>		plug-in module for the module slot of the PAC3200 / 4200
<b>Type of voltage supply</b>		from PAC 3200 / 4200
<b>Combustibility class acc. to UL 94</b>		V 0
<b>MTBF</b>	a	222.3
<b>Reference code</b>		
<ul style="list-style-type: none"> <li>• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750</li> <li>• according to DIN EN 61346-2</li> </ul>		P
		P

**Communication:**

<b>Design of the electrical connection</b>		screw-type terminals
<b>protocol / is supported</b>		SEAbus / MODBUS (switchable)
<b>Potential separation</b>		Maximum insulation voltage: 500V AC

**Dimensions and weights:**

<b>Width</b>	mm	43
<b>Height</b>	mm	63
<b>Depth</b>	mm	22

## Degree of protection

Protection class IP

IP20

## Ambient conditions:

Ambient temperature

- during operating

°C

-5 ... +55

Degree of pollution

2 according to IEC 61131

Transfer rate / min.

kbit/s

4.8

Transfer rate / maximum

kbit/s

38.4

## Certificates/approvals:

General Product Approval

EMC

Declaration of Conformity

other



GOST



C-TICK



EG-Konf.

[Confirmation](#)

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM9300-0AM00-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/7KM9300-0AM00-0AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=7KM9300-0AM00-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9300-0AM00-0AA0)

CAX-Online-Generator

<http://www.siemens.com/cax>

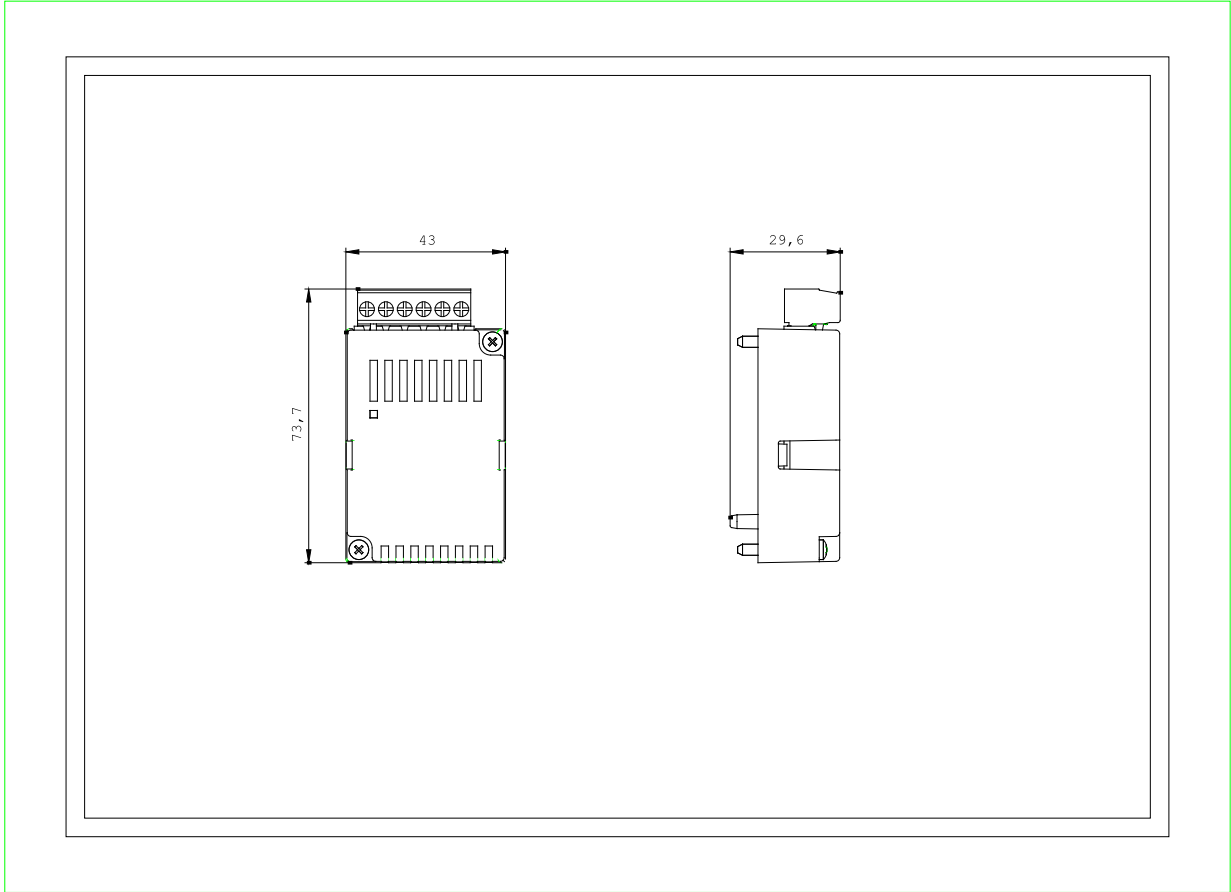

-P

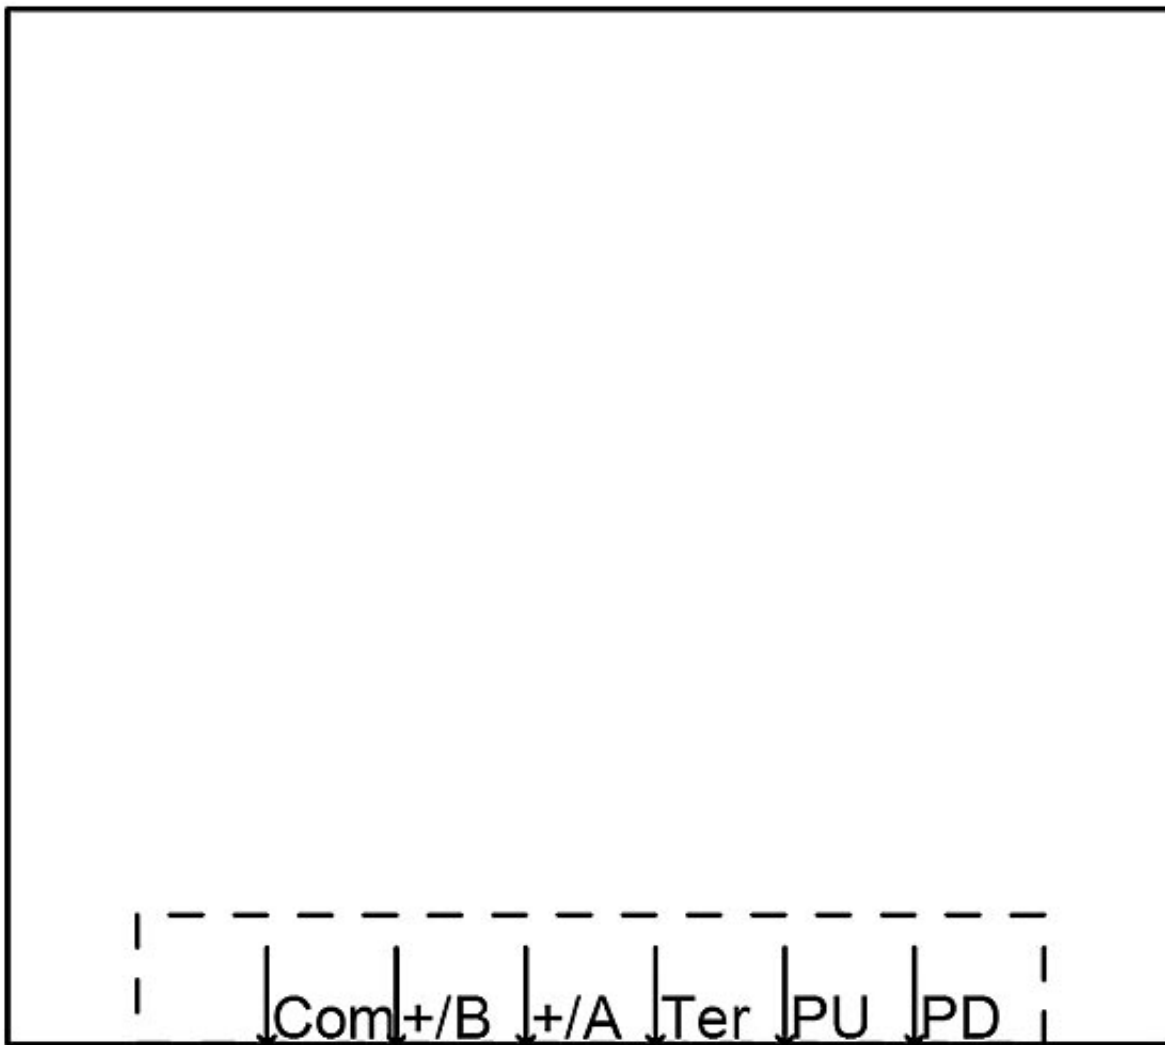

last change:

Jul 7, 2014