

motor suppressor RC, 3x575VAC/7,5kW

3 x 575 V AC
RC
with ferrule ends

Image

- Mounting method
- DIN-rail mountable TH35 (EN 60715)
- snaps on between contactor and DIN-rail
- bolted together, stacked

Vicarious picture

Approvals**Technical Data**

Material	Flame retardant plastic acc. to (UL 94)
Potting compound	2-component epoxy
Temperature range	-20...+60 °C
Dimensions H x W x D	75 x 45 x 42 mm
Frequency	50...60 Hz
Connection	approx. 250 mm, single cores 0.5 mm ² , with ferrule ends


Commercial data

Net weight	124
Weight unit	gram
Basic unit	pc.
Customs tariff number	85363010
Unit (piece)	1
Limited value	1

Comments

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.
with ferrule ends

Circuit diagram

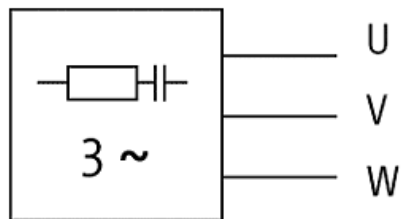

RC

Dimension drawing

