


Weidmüller terminal - SAK-series- are proved in millions of applications for more than 50 years.

Available for the two rail systems TS32 and TS35, the SAK terminals are useable for every application and for all cross-sections. SAK terminals fulfill the requirements of EN 60 947-7-1.

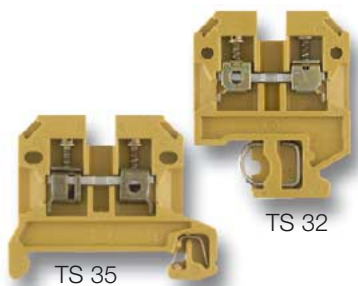


Thermosetting plastic or Thermoplastic


Terminal of thermosetting plastic are normally used in applications where high continuous service temperature and high flammability level are necessary. The Weidmüller thermosetting plastic KRG is very resistant against infection through mould and micro-organisms.

The thermoplastic material Polyamide 66 has very good electrical and mechanical properties upto 100°C. PA66 is flexible and unsusceptible to fracture, even with low temperatures.

Polyamid 66 has improved fire resistance and is self-extinguishing with flammability level V2 according to UL 94.

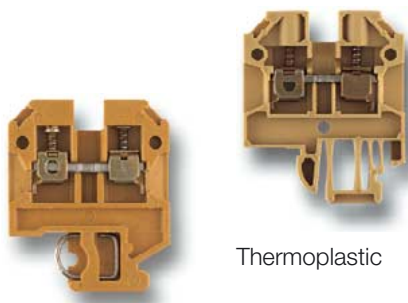

Thermosetting plastic

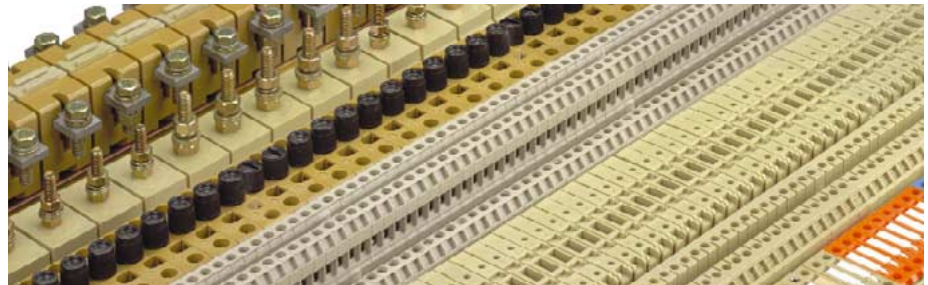


Cross-connection systems

40% of all terminals are cross-connected for potential branching.

Weidmüller distinguishes between the following cross-connection units for SAK-series:

- type Q pre-assembled cross-connections
- type QL permanent cross-connections
- type VL removeable cross-connection straps
- type QS removeable cross-connection plugs

Cross-connection systems from the SAK and AKZ series, type Q, QL or VL or other freely accessible live components, must be protected with appropriate covers ADP 1 or 4 or TSK 31.5 as long as they are to be inserted safe from contact.



Approvals

The following approvals apply to SAK terminals:

- UL-USA
- CSA-Canada
- GOST-Russia
- SEV-Switzerland
- KEMA-Netherlands
- Lloyds Register of Shipping
- Germanischer Lloyd
- Det Norske Veritas

SAK portfolio

- Feed-through terminals
- Protective conductor terminals
- Fuse terminals
- Disconnect-test terminals
- Feed-through terminals with tab, solder, WireWrap and Termi Point connections
- Initiator terminals, Actuator terminals
- Stud terminals

Accessories



An extensive assortment of accessories is available for Weidmüller SAK terminals:

- Partitions
- Cover plates
- Small partitions
- Test plugs
- Test adapters
- Marking material
- Cross-connections and
- Covers

Positioning of end plates or partitions between cross-connections

Operating voltage	Terminal width (in mm)					
	≤ 6	≤ 8	10	12	18	22
125 V ~	AP	-	-	-	-	-
250 V ~	AP	-	-	-	-	-
380 V ~	AP	AP	-	-	-	-
440 V ~	TW	AP	AP	AP	AP	-
500 V ~	TW	TW	AP	AP	AP	-
660 V ~	TW	TW	TW	TW	TW	AP
750 V ~	TW	TW	TW	TW	TW	AP

In PA terminals small partitions (TSch) have to be used up to 380 V.

Feed-through terminals

SAKD 2.5 N SAKD 2.5/10/35



UL LR

Dimensions/approvals	
Width/length/height (mm)	with TS 32 5/32.5/43.5
Width/length/height (mm)	with TS 35 x 7.5 5/44/38
Insulation stripping length/clamping screw/screwdriver blade	10/M 2.5/3.5 x 0.6
Rated data according to IEC 60 947-7-1	
Rated voltage/current/cross-section	500 V/24 A/2.5 mm ²
Rated impulse voltage/pollution severity	6 kV/3
Further technical data	
Tightening torque range	Nm 0.4...0.6
Torque setting with electric screwdriver type DMS 2	1

SAK 2.5/35 SAK 2.5/10/35



UL KESH LR

Dimensions/approvals	
Width/length/height (mm)	6/45/40
Insulation stripping length/clamping screw/screwdriver blade	10/M 2.5/3.5 x 0.6
Rated data according to IEC 60 947-7-1	
Rated voltage/current/cross-section	800 V/24 A/2.5 mm ²
Rated impulse voltage/pollution severity	8 kV/3
Further technical data	
Tightening torque range	Nm 0.4...0.6
Torque setting with electric screwdriver type DMS 2	1

SAK 2.5 SAK 2.5/10



UL KESH LR DNV

Dimensions/approvals	
Width/length/height (mm)	6/36.5/46.5
Insulation stripping length/clamping screw/screwdriver blade	10/M 2.5/3.5 x 0.6
Rated data according to IEC 60 947-7-1	
Rated voltage/current/cross-section	800 V/24 A/2.5 mm ² ³⁾
Rated impulse voltage/pollution severity	8 kV/3
Further technical data	
Tightening torque range	Nm 0.4...0.6
Torque setting with electric screwdriver type DMS 2	1

SAK 4/35 SAK 4/10/35



UL KESH

Dimensions/approvals	
Width/length/height (mm)	6.5/40/51.5
Insulation stripping length/clamping screw/screwdriver blade	12/M 3/3.5 x 0.6
Rated data according to IEC 60 947-7-1	
Rated voltage/current/cross-section	800 V/32 A/4 mm ²
Rated impulse voltage/pollution severity	8 kV/3
Further technical data	
Tightening torque range	Nm 0.5...1.0
Torque setting with electric screwdriver type DMS 2	2

Clampable conductor

Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	0.5...2.5
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	0.5...2.5
Plug gauge according to 60 947-7-1	Size	A 2
Continuous current of terminal for conductor size		30 A/4 mm ²
Continuous current rating of cross-connection 2...5-pole	A	24
Continuous current rating of cross-connection 6...10-pole	A	24

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/20 A/28...12 AWG
Voltage/current/conductor size	CSA	300 V/20 A/22...12 AWG

Ordering data

Version	Qty.	Qty.
KrG		
Blue KrG		
KrS		
PA		
Blue PA		
Orange PA		
Terminal block with marking PA		
Terminal block without marking PA		

End plate (thickness mm)

Type	Cat. No.	Qty.
KrG		
Blue KrG		
KrS		
PA	AP (1.5) 0150960000	20
Blue PA	AP (1.5) 0150980000	20
PA		
Blue PA		

Partition (thickness mm)

Type	Cat. No.	Qty.
KrG		
Blue KrG		
KrS		
PA	TW (1.5) 0191860000	20
Blue PA	TW (1.5) 0191880000	20
HP	TW (1.5) 0307500000	20

Small partition

Type	Cat. No.	Qty.
TSch 1		
TSch 3	0366860000	100

Cross-connection

Type	Cat. No.	Qty.
Q 4		
2-pole	Q 2 0367800000	50
3-pole	Q 3 0367900000	50
4-pole	Q 4 0368000000	50
10-pole	Q 10 0368100000	20

Cover plates

Type	Cat. No.	Qty.
AD 4	0303400000	50
BSKM3x22	0128900000	100

Switchable cross-connection link

Type	Cat. No.	Qty.
VL 2		
BS		
VH		
VL 2	0197000000	100
VH	0285100000	50
BS	0292500000	100

Marking tags

Type	Cat. No.	Qty.
DEK		
Standard		
DEK 5	see "Accessories"	
DEK 6	see "Accessories"	
DEK 6	see "Accessories"	
DEK 6.5	see "Accessories"	


Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ Contact-proof with ADP 4 cover profile (see section "Accessories")
²⁾ Not suitable for SST 3 safety pin

³⁾ Cat. No. 0279660000, 0279680000, 0380460000 and 0380480000, 41 A for 6 mm²

Feed-through terminals


SAK 4 SAK 4/10



DK 4 Q* DKB4 Q*/10*



DK 4 DK4/35



Dimensions/approvals

Width/length/height (mm)	with TS 32	
Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade		

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	800 V/32 A/4 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Further technical data

Tightening torque range	Nm	0.5...1.0
Torque setting with electric screwdriver type DMS 2		2

Clampable conductor

Solid H07V-U	mm ²	0.5...6
Stranded H07V-R	mm ²	0.5...4
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
With/without plastic insulating collar	mm ²	0.5...4
Plug gauge according to 60 947-7-1	Size	A 4
Continuous current of terminal for conductor size		41 A/6 mm ²
Continuous current rating of cross-connection 2...5-pole	A	36
Continuous current rating of cross-connection 6...10-pole	A	

Technical data

Voltage/current/conductor size	UL	600 V/20 A/22...12 AWG
Voltage/current/conductor size	CSA	600 V/36 A/26...10 AWG

Ordering data

Version	Cat. No.	Qty.
KrG	0128320000	100
Blue KrG	0128370000	100
KrS	0128330000	100
PA	0128360000 ¹⁾²⁾	100
Blue PA	0128380000 ¹⁾²⁾	100
Orange PA	0105060000 ¹⁾²⁾	100
Terminal block with marking PA	0322660000 ¹⁾²⁾	10
Terminal block without marking PA	0308860000 ¹⁾²⁾	10

End plate (thickness mm)

Type	Cat. No.	Qty.
KrG	AP (1.5) 0117920000	20
Blue KrG	AP (1.5) 0117970000	20
KrS	AP (1.5) 0117930000	20
PA	AP (1.5) 0117960000	20
Blue PA	AP (1.5) 0117980000	20
PA		
Blue PA		

Partition (thickness mm)

Type	Cat. No.	Qty.
KrG	TW (2.5) 0130120000	20
Blue KrG	TW (2.5) 0103170000	20
KrS	TW (2.5) 0130130000	20
PA	TW (1.5) 0130160000	20
Blue PA	TW (1.5) 0130180000	20
HP	TW (1.0) 0197100000	20

Small partition

TSch 6	TSch 1	0319160000	100
--------	--------	-------------------	-----

Cross-connection

Type	Cat. No.	Qty.
Q 2	0336700000	50
Q 3	0336800000	50
Q 4	0336900000	50
Q 10	0368800000	20
QB 2	0482700000 **	100
QB 3	0482800000 **	50
QB 4	0482900000 **	50

Switchable cross-connection link

VL 2	VL 2	0197000000	100
BS	VH	0285100000	50
	BS	0292500000	100

Marking tags

DEK	Standard	DEK6.5	see "Accessories"
-----	----------	--------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

* Accepts LS 2.8 shield lugs Cat. No. **1056400000**

** 2.5 mm² conductor connection when using QB

SAK 4

UL	CSA	LR	DNV
----	-----	----	-----

6.5/40/51.5

800 V/32 A/4 mm ²
8 kV/3

0.5...1.0
2

0.5...6
0.5...4
0.5...4
0.5...4
0.5...4
A 4
41 A/6 mm ²
36

600 V/20 A/22...12 AWG
600 V/36 A/26...10 AWG

Version	Cat. No.	Qty.
KrG	0128320000	100
Blue KrG	0128370000	100
KrS	0128330000	100
PA	0128360000 ¹⁾²⁾	100
Blue PA	0128380000 ¹⁾²⁾	100
Orange PA	0105060000 ¹⁾²⁾	100
Terminal block with marking PA	0322660000 ¹⁾²⁾	10
Terminal block without marking PA	0308860000 ¹⁾²⁾	10

End plate (thickness mm)

Type	Cat. No.	Qty.
KrG	AP (1.5) 0117920000	20
Blue KrG	AP (1.5) 0117970000	20
KrS	AP (1.5) 0117930000	20
PA	AP (1.5) 0117960000	20
Blue PA	AP (1.5) 0117980000	20
PA		
Blue PA		

Partition (thickness mm)

Type	Cat. No.	Qty.
KrG	TW (2.5) 0130120000	20
Blue KrG	TW (2.5) 0103170000	20
KrS	TW (2.5) 0130130000	20
PA	TW (1.5) 0130160000	20
Blue PA	TW (1.5) 0130180000	20
HP	TW (1.0) 0197100000	20

Small partition

TSch 6	TSch 1	0319160000	100
--------	--------	-------------------	-----

Cross-connection

Type	Cat. No.	Qty.
Q 2	0336700000	50
Q 3	0336800000	50
Q 4	0336900000	50
Q 10	0368800000	20
QB 2	0482700000 **	100
QB 3	0482800000 **	50
QB 4	0482900000 **	50

Switchable cross-connection link

VL 2	VL 2	0197000000	100
VH	VH	0285100000	50
BS	BS	0292500000	100

Marking tags

DEK	Standard	DEK6.5	see "Accessories"
-----	----------	--------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

DK 4 Q*

UL	CSA
----	-----

6/54/60

500 V/2 x 32 A/4 mm ²
6 kV/3

0.5...1.0
2

0.5...4
0.5...4
0.5...4
0.5...4
0.5...4
A 3
32 A/4 mm ²
32
32

300 V/27 A/22...12 AWG
300 V/10 A/26...12 AWG

Version	Cat. No.	Qty.
KrG	0128320000	100
Blue KrG	0128370000	100
KrS	0128330000	100
PA	0128360000 ¹⁾²⁾	100
Blue PA	0128380000 ¹⁾²⁾	100
Orange PA	0105060000 ¹⁾²⁾	100
Terminal block with marking PA	0322660000 ¹⁾²⁾	10
Terminal block without marking PA	0308860000 ¹⁾²⁾	10

End plate (thickness mm)

Type	Cat. No.	Qty.
KrG	AP (1.5) 0117920000	20
Blue KrG	AP (1.5) 0117970000	20
KrS	AP (1.5) 0117930000	20
PA	AP (1.5) 0117960000	20
Blue PA	AP (1.5) 0117980000	20
PA		
Blue PA		

Partition (thickness mm)

Type	Cat. No.	Qty.
KrG	TW (2.5) 0130120000	20
Blue KrG	TW (2.5) 0103170000	20
KrS	TW (2.5) 0130130000	20
PA	TW (1.5) 0130160000	20
Blue PA	TW (1.5) 0130180000	20
HP	TW (1.0) 0197100000	20

Small partition

TSch 6	TSch 1	0319160000	100
--------	--------	-------------------	-----

Cross-connection

Type	Cat. No.	Qty.
Q 2	0336400000	50
Q 3	0336500000	50
Q 4	0336600000	50
Q 10	0368600000	20
QB 2	0482700000 **	100
QB 3	0482800000 **	50
QB 4	0482900000 **	50

Switchable cross-connection link

VL 2	VL 2	0446700000	50
VH	VH	1056500000	100
BS	BS	0343100000	100

Marking tags

DEK	Standard	DEK6	see "Accessories"
-----	----------	------	-------------------


Mounting rails, end brackets, further marking material see "Accessories"

1) Contact-proof cross-connec. with ADP 4 over profile (see "Accessories")

2) Not suitable for fuse pin SST 3

Feed-through terminals

DK4 QV* DK4 QV/35*



UL

Dimensions/approvals	
Width/length/height (mm)	with TS 32 6/54/60
Width/length/height (mm)	with TS 35 x 7.5 6/54/60.5
Insulation stripping length/clamping screw/screwdriver blade	9 mm/M 3/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	500 V/32 A/4 mm ²
Rated impulse voltage/pollution severity	6 kV/3

Further technical data

Tightening torque range	Nm 0.5...1.0
Torque setting with electric screwdriver type DMS 2	2

Clampable conductor

Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	0.5...4
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
With/without plastic insulating collar	mm ²	0.5...4
Plug gauge according to 60 947-7-1	Size	A 3
Continuous current of terminal for conductor size		32 A/4 mm ²
Continuous current rating of cross-connection 2...5-pole	A	32
Continuous current rating of cross-connection 6...10-pole	A	32

Rated data according to UL/CSA

Voltage/current/conductor size	UL 300 V/27 A/22...12 AWG
Voltage/current/conductor size	CSA 300 V/10 A/26...12 AWG

Ordering data

Version	Qty.	Qty.
KrG		
Blue KrG		
KrS		
PA	0590260000 ¹⁾ 100 0363660000 ¹⁾ 100	
Blue PA	0590280000 ¹⁾ 100 0363680000 ¹⁾ 100	
Orange PA		
Terminal block with marking		
Terminal block without marking		

SAK 6 N SAK 6/10/35



UL

Width/length/height (mm)	8/40/51.5
Width/length/height (mm)	8/45/44
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 3.5/4.0 x 0.8

Rated voltage/current/cross-section	800 V/41 A/6 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Tightening torque range	Nm 0.8...1.6
Torque setting with electric screwdriver type DMS 2	3

Solid H07V-U	mm ²	0.5...10
Stranded H07V-R	mm ²	0.5...6
Flexible H07V-K	mm ²	0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
With/without plastic insulating collar	mm ²	0.5...6
Plug gauge according to 60 947-7-1	Size	A 5
Continuous current of terminal for conductor size		41
Continuous current rating of cross-connection 2...5-pole	A	41
Continuous current rating of cross-connection 6...10-pole	A	41

Voltage/current/conductor size	600 V/40 A/22...8 AWG
Voltage/current/conductor size	600 V/47 A/20...8 AWG

Version	Qty.	Qty.
KrG		
Blue KrG		
KrS		
PA	0193220000 ¹⁾ 100 0380520000 ¹⁾ 100	
Blue PA	0380570000 ¹⁾ 100	
Orange PA		
Terminal block with marking		
Terminal block without marking		

SAK 10 SAK 10/10/35



UL

Width/length/height (mm)	10/40/51.5
Width/length/height (mm)	10/45/44
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 4/5.5 x 1.0

Rated voltage/current/cross-section	800 V/57 A/10 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Tightening torque range	Nm 1.2...2.0 ²⁾
Torque setting with electric screwdriver type DMS 2	4

Solid H07V-U	mm ²	1.5...10
Stranded H07V-R	mm ²	2.5...16
Flexible H07V-K	mm ²	1.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
With/without plastic insulating collar	mm ²	1.5...10
Plug gauge according to 60 947-7-1	Size	B 6
Continuous current of terminal for conductor size		76 A/16 mm ²
Continuous current rating of cross-connection 2...5-pole	A	57
Continuous current rating of cross-connection 6...10-pole	A	57

Voltage/current/conductor size	600 V/60 A/14...6 AWG ³⁾
Voltage/current/conductor size	600 V/65 A/14...6 AWG ³⁾

Version	Qty.	Qty.
KrG		
Blue KrG		
KrS		
PA	0110020000 ¹⁾ 100 0443720000 ¹⁾ 100	
Blue PA	0110070000 ¹⁾ 100 0443770000 ¹⁾ 100	
Orange PA		
Terminal block with marking		
Terminal block without marking		

SAK 16 SAK 16/35



UL

Width/length/height (mm)	12/50/57.5
Width/length/height (mm)	12/50/50
Insulation stripping length/clamping screw/screwdriver blade	15 mm/M 4/5.5 x 1.0

Rated voltage/current/cross-section	1000 V/76 A/16 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4

Solid H07V-U	mm ²	2.5...10
Stranded H07V-R	mm ²	4...16 ²⁾
Flexible H07V-K	mm ²	4...16
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
With/without plastic insulating collar	mm ²	4...16
Plug gauge according to 60 947-7-1	Size	B 6
Continuous current of terminal for conductor size		76
Continuous current rating of cross-connection 2...5-pole	A	76
Continuous current rating of cross-connection 6...10-pole	A	76

Voltage/current/conductor size	600 V/80 A/12...4 AWG
Voltage/current/conductor size	600 V/87 A/10...4 AWG

Version	Qty.	Qty.
KrG		
Blue KrG		
KrS		
PA	0271020000 ¹⁾ 50 0380620000 ¹⁾ 50	
Blue PA	0271030000 ¹⁾ 50	
Orange PA		
Terminal block with marking		
Terminal block without marking		

End plate (thickness mm)

Type	Cat. No.	Qty.
AP		
KrG		
Blue KrG		
KrS		
PA	AP (1.5) 1397160000 20	
Blue PA	AP (1.5) 1397180000 20	

Partition (thickness mm)

Type	Cat. No.	Qty.
TW		
WTW		
Small partition		
KrG		
Blue KrG		
KrS		
PA	WTW (Ex) 1058800000 20	
Blue PA		
TSch 6	TW (2.0) 0607000000 20	
	TSch 6 0190260000 100	

Cross-connection

Type	Cat. No.	Qty.
Q 4		
QB 4		
2-pole	Q 2 0336400000 50	
3-pole	Q 3 0336500000 50	
4-pole	Q 4 0336600000 50	
10-pole	Q 10 0368600000 20	
	QB 2 0482700000 ** 100	
	QB 3 0482800000 ** 50	
	QB 4 0482900000 ** 50	

Cover

Type	Cat. No.	Qty.
AD 4	0303400000 50	
BSKM 2.5 x18	0303300000 100	

Switchable cross-connection link

Type	Cat. No.	Qty.
VL 2	0446700000 50	
VH	1056500000 100	
BS	0343100000 100	

Marking tags

Print	DEK	Standard
	DEK 6	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* Accepts LS 2.8 shield lugs Cat. No. **1056400000**
 ** 2.5 mm² conductor connection when using QB

¹⁾ Contact-proof with ADP 4 cover profile (see section "Accessories")

²⁾ Tightening torque for 16 mm² stranded: 2 Nm

³⁾ Tightening torque for 16 mm² and AWG6: 2 Nm

Feed-through terminals

SAK 35 N SAK 35 N/35



UL CE LR DNV

Width/length/height (mm) with TS 32	16/58/67.5
Width/length/height (mm) with TS 35 x 7.5	16/63/60
Insulation stripping length/clamping screw/screwdriver blade	18 mm/M 6/6.5 x 1.2

Dimensions/approvals

Width/length/height (mm)	with TS 32	16/58/67.5
Width/length/height (mm)	with TS 35 x 7.5	16/63/60
Insulation stripping length/clamping screw/screwdriver blade		18 mm/M 6/6.5 x 1.2

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	1000 V/125 A/35 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Further technical data

Tightening torque range	Nm	4.0...5.0/4.0...6.0***
Torque setting with electric screwdriver type DMS 2		

Clampable conductor

Conductor type	Size	SAK 35 N	SAK 35	SAK 70	SAK 95
Solid H07V-U	mm ²	2.5...16	6...16	16	10...16
Stranded H07V-R	mm ²	2.5...50	16...50	16...70 1)	10...120 2)
Flexible H07V-K	mm ²	2.5...35	10...35	16...70 1)	10...95 2)
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	2.5...35	10...35	16...35	10...35
Plug gauge according to 60 947-7-1	Size	B 8	B 9	B 11	B 12
Continuous current of terminal for conductor size		125 A/35 mm ²	125 A/35 mm ²	192 A/70 mm ²	232 A/95 mm ²
Continuous current rating of cross-connection 2...5-pole	A	65	99	180	180
Continuous current rating of cross-connection 6...10-pole	A	65	99		

Rated data according to UL/CSA

Voltage/current/conductor size	UL	600 V/100 A/12...2 AWG	600 V/100 A/6...2 AWG	600 V/145 A/4...2/0 AWG	600 V/190 A/6...3/0 AWG
Voltage/current/conductor size	CSA	600 V/120 A/12...2 AWG	600 V/145 A/6...2 AWG	600 V/150 A/4...2/0 AWG	600 V/260 A/6...3/0 AWG

Ordering data

Version	Type	Cat. No.	Qty.
KrG	Hexagon socket	0550620000	20
	Hexagon socket Blue	0608220000	20
KrS	Hexagon socket	0555720000	20
	Hexagon socket Blue	0608320000	20
PA	Hexagon socket	0550630000	20
	Hexagon socket Blue	0608370000	20

SAK 35 SAK 35/35



UL CE KEMA LR DNV

Width/length/height (mm)	18/58/67.5
Width/length/height (mm)	18/58/60
Insulation stripping length/clamping screw/screwdriver blade	20 mm/M 6/6.5 x 1.2

SAK 70 SAK 70/35



UL CE LR DNV

Width/length/height (mm)	22/75/79.5
Width/length/height (mm)	22/75/87
Insulation stripping length/clamping screw/screwdriver blade	24 mm/M 8/S 6 D911

SAK 95 SAK 95/35



UL CE DNV

Width/length/height (mm)	28/83.5/100.5
Width/length/height (mm)	28/83.5/96.5
Insulation stripping length/clamping screw/screwdriver blade	30 mm/M 10/S 8 D6911

End plate (thickness mm)



Type	Cat. No.	Qty.
KrG	AP (3.0) 0303620000	10
Blue KrG	AP (3.0) 0303670000	10
KrS	AP (3.0) 0303630000	10
PA	AP (1.5) 0303660000	10
Blue PA	AP (3.0) 0303680000	10
Orange PA		

Partition (thickness mm)



Type	Cat. No.	Qty.
KrG	TW (3.0) 0304320000	10
Blue KrG		
KrS	TW (3.0) 0304330000	10
PA	TW (1.5) 0304360000	10
Blue PA		

Cross-connection



Type	Cat. No.	Qty.
QL 2	0564900000	50
QL 3	0565000000	50
QL 4	0565100000	50
QL 10	0565200000	20
VH 17	0267000000	50
BS M 4x30	0267100000	50
SS M 4	0136400000	100

Switchable cross-connection link



Type	Cat. No.	Qty.
VL 2	0124000000	50
VH 24.5	0298700000	50
BS M 4x35	0298900000	50

Cover / test plug



Type	Cat. No.	Qty.
AD 4	0576700000	50
BSKM 4x32	0129100000	50
PS 4	0299600000	20

Marking tags



Type	Cat. No.	Qty.
DEK 5	see "Accessories"	

Mounting rails, end brackets, further marking material see "Accessories"

*** For hexagon socket


1) 12 Nm for 70 mm²
2) 20 Nm for 95 mm² and 120 mm²

Feed-through terminals for thermocouples

Busbars made from thermocouple materials according to DIN IEC 584

SAK 2.5 TC


DK 4 Q/TC



Weidmüller's **thermocouple-terminals** are specially designed for transmitting the smallest voltages in temperature measuring circuits. Special busbars ensure that no false signals occur in the terminal when temperature differences exist in the positive and negative path.

This high measuring precision is necessary for, e.g. test beds, air craft engines, for complicated chemical processes, controls, etc.

I. Configuration of a temperature measuring circuit



- 1 Thermocouple (sensor)
- 2 Thermocouple terminals
- 3 Compensation conductor
- 4 Reference point
- 5 Supply conductors (to and from)
- 6 Measuring device

The thermocouple terminals displayed in this measurement circuit are used to thermoelectrically transmit thermal e.m.f. of the thermocouple to the reference point and indicating device via the thermocouple.

II. Symbols Thermocouples according to IEC 584 DIN 43710

Terminal	Busbar material trade name
a) Type J	
Fe (positive leg)	Iron
CuNi (negative leg)	Constantan
b) Type T	
Cu (positive leg)	Copper
CuNi (negative leg)	Constantan
c) Type K	
NiCr (positive leg)	Chromel
Ni (negative leg)	Alumel

Dimensions/approvals	SAK 2.5 TC	DK 4 Q/TC
Width/length/height (mm) with TS 32	6/36.5/49.5	6/54/59.5
Width/length/height (mm) with TS 35 x 7.5		6/54/60.5
Insulation stripping length/clamping screw/screwdriver blade	10 mm/M 2.5/3.5 x 0.6	9 mm/M 3/3.5 x 0.6
Technical data/VDE		
Rated voltage/current/cross-section	-/-/2.5 mm ²	-/-/4 mm ²
Tightening torque range	Nm 0.4...0.6	0.5...1

Ordering data	Version	Type	Cat. No.	Qty.
	NiCr		0107260000	100
	Ni		0107160000	100
	CuNi		0189860000	100
	Fe		0190060000	100
	Cu		0189960000	100
	NiCr/Ni	K	1284160000	1338260000
	Cu/CuNi	T	1285660000	1338160000
	Fe/CuNi	J	1284060000	1338060000

End plate (thickness mm)	Type	Cat. No.	Qty.
	KrG		
	Blue KrG		
	KrS		
	PA	AP (1.5)	0279560000 20
	Blue PA		
	Orange PA		

Partition (thickness mm)	Type	Cat. No.	Qty.
	KrG		
	Blue KrG		
	KrS		
	PA	TW (1.5)	0302860000 20
	WEM		
	for TS 32 HP		

Marking tags	Print
1 2 3 4 5 6	DEK Standard DEK 6 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"	DEK 6 see "Accessories"

SAK-series

Feed-through terminals

Terminals/Accessories

SAKG 28 I


SAKG 28 II




The Weidmüller SAKG range offers the following connection variants:

- clamping yoke/flat lug as a combination, Version I.
- flat lug, Version II.
Two types of threading are provided here.
a) screw set with lock nut
b) with thread in busbar
- clamping yoke connection, Version III.
The stripped conductor can be connected without further preparation.

Versions




Version I



Version II
without thread



Version II G
with thread




Version III

Cables with cable lugs are connected to SAKG terminals of Version I and to SS stud terminals.

Fitting instructions for SAKG terminals

When tightening the clamping screw, it is recommended that the conductor be held against the direction of tightening to prevent deformation of the mounting rail and so as not to place the terminal foot under undue torsional forces.

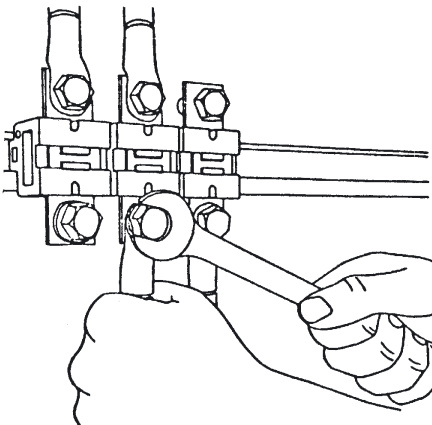

Cover

To ensure shock protection following connections of **conductors**, AH covers can be clipped onto the terminal.

Dimensions/approvals

Width/length/height (mm)	with TS 32	
Width/length/height (mm)	with TS 35	
Insulation stripping length/clamping screw/screwdriver blade		

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	1000 V*/125 A/35 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Further technical data

Tightening torque range	Nm	3...6
Torque setting with electric screwdriver type DMS 2		

Clampable conductor

Solid H07V-U	mm ²	6...35
Stranded H07V-R	mm ²	6...35
Flexible H07V-K	mm ²	10...35
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	6...35
Plug gauge according to 60 947-7-1	Size	B 9
Continuous current of terminal for conductor size		125 A/35 mm ²
Continuous current rating of cross-connection 2...5-pole	A	(QL 2) 125
Continuous current rating of cross-connection 6...10-pole	A	(QL 2) 125

Rated data according to UL/CSA

Voltage/current/conductor size	UL	600 V/95 A/2 AWG
Voltage/current/conductor size	CSA	600 V/110 A/6...1 AWG

Ordering data

Type		Cat. No.	Qty.
KrG		0170020000	10

UL @

28/70/63.5

15 mm/M 6/-

1000 V*/125 A/35 mm²

8 kV/3

3...6

6...35

6...35

10...35

6...35

B 9

125 A/35 mm²

(QL 2) 125

600 V/95 A/2 AWG

600 V/110 A/6...1 AWG

Cat. No.

Qty.

0170020000 10

UL @ DNV

28/70/53

-/M 6/-

1000 V*/125 A/35 mm²

8 kV/3

3...6

125 A/35 mm²

(QL 2) 125

600 V/115 A/2 AWG

600 V/110 A/6...1 AWG

Cat. No.

Qty.

0170320000 10

End plate, hard paper

	Cat. No.	Qty.
	EP 1 (2)	0205100000 10
	EP 1 (2)	0205200000 10



0180700000, 0205300000

0180800000, 0205400000 tropic-proof



Partition, hard paper (thickness in mm)

	Cat. No.	Qty.
	TW 1 (2)	0151400000 10
	TW 1 (2)	0164600000 10



0177100000 B/L/H (incl. TS 32) mm

0179900000 B/L/H (incl. TS 35) mm



Cross-connection

	2-pole	QL 2	0193900000 5
	3-pole	QL 3	0407600000 5
	4-pole	QL 4	0407700000 5



Cover

AH 28 **0326660000** 5



Marking tags

	1	2	3	4	5	6	DEK	Standard
							DEK 5	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.

Feed-through terminals

SAKG 28 II G



28/70/53
-/M 6/-
1000 V*/125 A/35 mm ²
8 kV/3
3...6
125 A/35 mm ²
(QL 2) 125

600 V/110 A/6...1 AWG
Cat. No. Qty.
0185020000 10

EP 1 (2)	Cat. No.	Qty.
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

Cat. No.	Qty.
----------	------

TW 1 (2)	Cat. No.	Qty.
TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10

2/120/75.5

QL 2	0193900000	5
QL 3	0407600000	5
QL 4	0407700000	5

AH 28	0326660000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 28 III



28/70/63.5
15 mm/M 6/-
1000 V*/125 A/35 mm ²
8 kV/3
3...6
6...35
6...35
10...35
6...35
B 9
600 V/95 A/2 AWG
600 V/135 A/8...2 AWG

600 V/135 A/8...2 AWG
Cat. No. Qty.
0170820000 10

EP 1 (2)	Cat. No.	Qty.
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

Cat. No.	Qty.
----------	------

TW 1 (2)	Cat. No.	Qty.
TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10

2/120/75.5

QL 2	0193900000	5
QL 3	0407600000	5
QL 4	0407700000	5

AH 28	0326660000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 I SAKG 32/35 I



32/87/84
32/87/84.5
26 mm/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
10...70
10...70
10...70
10...35
B 11
150 A/50 mm ²
(QL 2) 150

600 V/165 A/3 AWG
600 V/170 A/1...2/0 AWG
Cat. No. Qty.
0286620000 0637120000 10

EP 1 (2)	Cat. No.	Qty.
EP 1 (2)	0205300000	10
EP 1 (2)	0205400000	10

EP 2/35 (2)	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	Cat. No.	Qty.
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

2/160/90.5
2/160/90.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 II SAKG 32/35 II



32/80/53
32/80/51
-/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
150 A/50 mm ²
(QL 2) 150

600 V/200 A/3 AWG
600 V/170 A/1...2/0 AWG
Cat. No. Qty.
0170420000 0637320000 10

EP 1 (2)	Cat. No.	Qty.
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

EP 1/35 (2)	Cat. No.	Qty.
EP 1/35 (2)	0180700000	10
EP 1/35 (2)	0180600000	10

TW 1 (2)	Cat. No.	Qty.
TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10

2/120**/75.5
2/120**/75.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 II G SAKG 32/35 II G



32/80/53
32/80/53
-/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
150 A/50 mm ²
(QL 2) 150

600 V/170 A/1...2/0 AWG
Cat. No. Qty.
0185120000 0637420000 10

EP 1 (2)	Cat. No.	Qty.
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

EP 1/35 (2)	Cat. No.	Qty.
EP 1/35 (2)	0180700000	10
EP 1/35 (2)	0180600000	10

TW 1 (2)	Cat. No.	Qty.
TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10


2/120**/75.5
2/120**/75.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 32 III SAKG 32/35 III



32/94/84
32/94/84.5
26 mm/M 8/-
1000 V*/150 A/50 mm ²
8 kV/3
6...12
10...70
10...70
10...70
10...35
B 11
150 A/50 mm ²

600 V/165 A/3 AWG
600 V/185 A/1...2/0 AWG
Cat. No. Qty.
0286720000 0637220000 10

EP 2 (2)	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

EP 2/35 (2)	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

TW 2 (2)	Cat. No.	Qty.
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

2/160/90.5
2/160/90.5

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 32	0326760000	5
-------	------------	---

DEK 5	see "Accessories"
-------	-------------------

* During conductor connection, observe clearance and creepage distances. Insert partitions if necessary
 ** For Cat. No. 0180600000 and 0180700000: length = 160 mm.

Feed-through terminals

SAKG 70 II G SAKG 70/35 II G



Ⓢ Ⓡ Ⓡ DNV

Width/length/height (mm) with TS 32	32/84/54
Width/length/height (mm) with TS 35 x 7.5	32/84/53
Insulation stripping length/clamping screw/screwdriver blade	-/M 8/-

Dimensions/approvals

Width/length/height (mm)	with TS 32	32/84/54
Width/length/height (mm)	with TS 35 x 7.5	32/84/53
Insulation stripping length/clamping screw/screwdriver blade		-/M 8/-

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	1000 V*/192 A/70 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Further technical data

Tightening torque range	Nm	6...12
Torque setting with electric screwdriver type DMS 2		

Clampable conductor

Solid H07V-U	mm ²	
Stranded H07V-R	mm ²	10...95
Flexible H07V-K	mm ²	10...95
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	10...35
Plug gauge according to 60 947-7-1	Size	B 12
Continuous current of terminal for conductor size		192 A/90 mm ²
Continuous current rating of cross-connection 2...5-pole	A	(QL 2) 192
Continuous current rating of cross-connection 6...10-pole	A	


Rated data according to UL/CSA

Voltage/current/conductor size	UL	600 V/200 A/2/0...4/0 AWG
Voltage/current/conductor size	CSA	600 V/250 A/2/0...4/0AWG

Ordering data

Version	KrG	Qty.	Qty.	0150420000	10	0636620000	10
---------	-----	------	------	------------	----	------------	----

SAKG 40 I SAKG 40/35 I



Ⓢ Ⓡ Ⓡ Ⓡ

Width/length/height (mm)	40/95/84
Width/length/height (mm)	46/95/85.5
Insulation stripping length/clamping screw/screwdriver blade	27 mm/M 10/-

SAKG 40 II SAKG 40/35 II



Ⓢ Ⓡ Ⓡ Ⓡ DNV

Width/length/height (mm)	40/90/53
Width/length/height (mm)	46/90/53
Insulation stripping length/clamping screw/screwdriver blade	-/M 10/-

SAKG 40 II G SAKG 40/35 II G



Ⓢ Ⓡ Ⓡ Ⓡ

Width/length/height (mm)	40/90/55
Width/length/height (mm)	46/90/55
Insulation stripping length/clamping screw/screwdriver blade	-/M 10/-

Rated voltage/current/cross-section	1000 V*/232 A/95 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Tightening torque range	Nm	10...20
Torque setting with electric screwdriver type DMS 2		

Solid H07V-U	mm ²	10...95
Stranded H07V-R	mm ²	10...95
Flexible H07V-K	mm ²	10...95
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	10...35
Plug gauge according to 60 947-7-1	Size	B 12
Continuous current of terminal for conductor size		232 A/95 mm ²
Continuous current rating of cross-connection 2...5-pole	A	(QL 2) 232
Continuous current rating of cross-connection 6...10-pole	A	

Voltage/current/conductor size	UL	600 V/230 A/4/0 AWG
Voltage/current/conductor size	CSA	600 V/250 A/2/0...4/0 AWG

Version	KrG	Qty.	Qty.	0170520000	10	0637720000	5
---------	-----	------	------	------------	----	------------	---

End plate, hard paper (thickness mm)

0205100000, 0180500000			
0205200000, 0180600000	tropic-proof		

EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

Cat. No.	Qty.	
EP 1 (2)	0205100000	10
EP 1 (2)	0205200000	10

Cat. No.	Qty.	
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

Cat. No.	Qty.	
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

Cat. No.	Qty.	
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

0180700000, 0205300000			
0180800000, 0205400000	tropic-proof		

EP 1/35 (2)	0180500000	10
EP 1/35 (2)	0180600000	10

Cat. No.	Qty.	
EP 1/35 (2)	0180500000	10
EP 1/35 (2)	0180600000	10

Cat. No.	Qty.	
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

Cat. No.	Qty.	
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

Cat. No.	Qty.	
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

Partition, hard paper (thickness mm)

0151400000			
0164600000	tropic-proof		

TW 1 (2)	0151400000	10
TW 1 (2)	0164600000	10

Qty.		
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

Qty.		
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

Qty.		
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

Qty.		
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10

0177100000	B/L/H (incl. TS 32) mm	2/120/75.5
0179900000	B/L/H (incl. TS 35) mm	2/120/75.5

2/160/90.5		
2/160/90.5		

2/160/90.5		
2/160/90.5		

2/160/90.5		
2/160/90.5		

2/160/90.5		
2/160/90.5		

Cross-connection

2-pole, QL 2	Qty.	Qty.	0194000000	10	0194100000	10	0211400000	10
3-pole, QL 3			0441500000	10	0263500000	10	0444900000	10
4-pole, QL 4			0441600000	10	0409800000	10	0445000000	10

0194000000	10	0194100000	10	0211400000	10
0441500000	10	0263500000	10	0444900000	10
0441600000	10	0409800000	10	0445000000	10

Cover

AH 32	0326760000	5
-------	------------	---

AH 40	0326860000	5
-------	------------	---

AH 40	0326860000	5
-------	------------	---

AH 40	0326860000	5
-------	------------	---

Marking tags

1	2	3	4	5	6	DEK	Standard	DEK 5	see "Accessories"
---	---	---	---	---	---	-----	----------	-------	-------------------

DEK 5	see "Accessories"
-------	-------------------

DEK 5	see "Accessories"
-------	-------------------


DEK 5	see "Accessories"
-------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

*During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.

Feed-through terminals

SAKG 40 III SAKG 40/35 III



40/100/84
46/100/85.5
27 mm/M 10/-
1000 V*/232 A/95 mm²
8 kV/3
10...20
10...95
10...95
10...95
10...35
B 12
232 A/95 mm²

600 V/195 A/4/0 AWG	
600 V/230 A/2/0...4/0 AWG	
	Qty.
0286920000 10	0637620000 5

	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10

2/160/90.5	
2/160/90.5	

QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5

AH 40	0326860000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 46 II SAKG 46/35 II



46/106/55
46/106/54.5
-/M 12/-
1000 V*/309 A/150 mm²
8 kV/3
14...31
309 A/150 mm²

600 V/285 A/4/0 AWG	
600 V/365 A/300 MCM	
	Qty.
0170620000 10	0637920000 5

	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10

2/160/90.5	
2/160/90.5	

QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5

AH 46	0326960000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 46 II G SAKG 46/35 II G



46/106/57.5
46/106/57
-/M 12/-
1000 V*/309 A/150 mm²
8 kV/3
14...31
309 A/150 mm²
(QL 2) 309

600 V/285 A/4/0 AWG	
600 V/365 A/300 MCM	
	Qty.
0185320000 10	0638020000 5

	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10

2/160/90.5	
2/160/90.5	

QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5

AH 46	0326960000	5
-------	-------------------	---

DEK 5	see "Accessories"
-------	-------------------

SAKG 54 II SAKG 54/35 II



54/122/57
54/122/57
-/M 16/-
1000 V*/415 A/240 mm²
8 kV/3
25...60
415 A/240 mm²
(QL 2) 415

600 V/380 A/500 MCM	
600 V/600 A/300...500 MCM	
	Qty.
0170720000 10	0638120000 5

	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10


2/160/90.5	
2/160/90.5	

QL 2	0264400000	5
QL 3	0408000000	5
QL 4	0247400000	5

--	--	--

DEK 5	see "Accessories"
-------	-------------------

SAKG 54 II G SAKG 54/35 II G



54/122/60
54/122/60
-/M 16/-
1000 V*/415 A/240 mm²
8 kV/3
25...60
415 A/240 mm²
(QL 2) 415

600 V/380 A/500 MCM	
600 V/600 A/300...500 MCM	
	Qty.
0185420000 10	0638220000 5

	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10

	Qty.
TW 2 (2)	0177100000 10
TW 2 (2)	0179900000 10

2/160/90.5	
2/160/90.5	

QL 2	0264400000	5
QL 3	0408000000	5
QL 4	0247400000	5

--	--	--

DEK 5	see "Accessories"
-------	-------------------

SAKG 46/I AL SAKG 46/II AL



46/112/74
23 mm/M 12/M 14/-
1000 V*/309 A/150 mm²
8 kV/3
14...31/25...40
50...240
35...185

	Qty.
1287920000** 5	

	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10

	Cat. No.	Qty.

	Qty.

2/160/90.5	
2/160/90.5	

QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5

AH 46	0326960000	5
-------	-------------------	---


DEK 5	see "Accessories"
-------	-------------------

* During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.
** Suitable for connection of 1 aluminium conductor of max 185 mm²

*** Suitable for connection of 2 aluminium conductors of max. 185 mm²

Stud terminals


SS 6 SS 6/35




KST 5 KST 5/35



KST 6 KST 6/35



KST 8 KST 8/35



Dimensions/approvals

Width/length/height (mm)	with TS 32	
Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade		

Rated data

Rated voltage/current/cross-section		
Rated impulse voltage/pollution severity		

Further technical data

Tightening torque range	Nm	
Torque setting with electric screwdriver type DMS 2		

Clampable conductor

Solid H07V-U	mm ²	
Stranded H07V-R	mm ²	
Flexible H07V-K	mm ²	
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	
Plug gauge according to 60 947-7-1	Size	
Continuous current of terminal for conductor size		
Continuous current rating of cross-connection 2...5-pole	A	
Continuous current rating of cross-connection 6...10-pole	A	

Rated data according to UL/CSA

Voltage/current/conductor size	UL	
Voltage/current/conductor size	CSA	

Ordering data

Version		
KrG		
PA		
PPO		
KrG		
for TS 35 x 7.5	PA	
for TS 35 x 15/2.3	PA	

18/40/62
18/49.5/54.5
-/M 6/-
1000 V ¹⁾ /76 A/16 mm ²
6 kV/3
3...6
82 A/16 mm ²
600 V/85 A/12...4 AWG
600 V/65 A/6 AWG
Qty.
0498220000 25
0649820000 25

24/60/55
24/62.5/49.5
-/M 5/-
1000 V ¹⁾ /57 A/10 mm ²
8 kV/3
2...4
65 A/10 mm ²
600 V/50 A/12...6 AWG
Qty.
9503370000 25
9508230000 25
9528300000 25

24/60/62
24/62.5/54.5
-/M 6/-
1000 V ¹⁾ /76 A/16 mm ²
8 kV/3
3...6
82 A/16 mm ²
600 V/65 A/12...6 AWG
Qty.
9506940000 25
9528310000 25

24/60/72
24/62.5/64.5
-/M 8/-
1000 V ¹⁾ /125 A/35 mm ²
8 kV/3
6...12
135 A/35 mm ²
600 V/115 A/12...2 AWG
Qty.
9501320000 25
9506950000 25
9528320000 25

Partition, (thickness mm)

PA		
Hard paper		
HM		
HM		
Width/length/height (incl. TS 32) mm		
Width/length/height (incl. TS 35) mm		

Cross-connection

2-pole		
3-pole		

Marking tags

DEK	Standard	
1	2	3
4	5	6

Cat. No.	Qty.
TW SS6 (TS32)	10
TW-GW (TS35)	20

TW right	1718530000	10
TW left ²⁾	1752800000	10
2/160/83.5		
2/160/78.5		
QL 2	0284300000	20
QL 3	0279000000	20

+		
TW right	1718530000	10
TW left ²⁾	1752800000	10
2/160/83.5		
2/160/78.5		
QL 2	9503390000	1

TW right	1718530000	10
TW left ²⁾	1752800000	10
2/160/83.5		
2/160/78.5		
QL 2	9501350000	5

+		
TW right	1718530000	10
TW left ²⁾	1752800000	10
2/160/83.5		
2/160/78.5		
QL 2	9501360000	1

+		
TW right	1718530000	10
TW left ²⁾	1752800000	10
2/160/83.5		
2/160/78.5		
QL 2	9501360000	1

DEK 5	see "Accessories"
-------	-------------------

DEK 5	see "Accessories"
-------	-------------------

DEK 5	see "Accessories"
-------	-------------------

DEK 5	see "Accessories"
-------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"


* Depends on cable lug

¹⁾ with partition

²⁾ Left AP is required only once at beginning of terminal strip


Stud terminals

KST 10
KST 10/35



34/60/82			34/60/82	
34/62.5/74.5			34/62.5/74.5	
-/M 10/-			-/M 12/-	
1000 V ¹⁾ /192 A/70 mm ²			1000 V ¹⁾ /232 A/95 mm ²	
8 kV/3			8 kV/3	
10...20			14...31	
207 A/70 mm ²			250 A/95 mm ²	
200			200	
600 V/175 A/12...2/0			600 V/200 A/12...3/0	
	Qty.		Qty.	
9501330000	20			
9506960000	20	9506970000	20	
9528330000	20	9528340000	20	
	+		+	
TW right	1718530000	10	TW right	1718530000
TW left	1752800000	10	TW left	1752800000
2/160/83.5			2/160/83.5	
2/160/78.5			2/160/78.5	
QL 2	9501370000	1	QL 2	9501380000
DEK 5	see "Accessories"		DEK 5	see "Accessories"

KST 12
KST 12/35



PE terminals

EK 2.5 N EK 2.5/35



EK 4 EK 4/35



EK 6/35



EK 10 EK 10/35



Dimensions/approvals

Width/length/height (mm)	with TS 32	6/36.5/49.5	8/40/51.5	8/56/44	10/40/51.5
Width/length/height (mm)	with TS 35 x 7.5	6/56/40	6.5/56/44	12 mm/M 3.5/4.0/0.8	10/56/44
Insulation stripping length/clamping screw/screwdriver blade		10 mm/M 2.5/3.5 x 0.6	12 mm/M 3/3.5 x 0.6		12 mm/M 4/5.5 x 1.0
Rated data according to IEC 60 947-7-2					
Rated voltage/current with PEN/cross-section		-/-/2.5 mm ²	-/-/4 mm ²	-/-/6 mm ²	-/-/10 mm ²
Rated voltage/rated impulse voltage acc. to VDE 0110/1.89/ pollution severity					

Further technical data

Tightening torque range	Nm	0.4...0.8/0.5...1.0*	0.5...1.0/0.5...1.0*	1.2...1.6/0.5...1.0*	1.2...2.4/0.5...1.0*
-------------------------	----	----------------------	----------------------	----------------------	----------------------

Clampable conductor

Solid H07V-U	mm ²	0.5...4	0.5...6	0.5...10	0.5...10
Stranded H07V-R	mm ²	0.5...2.5	0.5...4	1.5...6	1.5...6
Flexible H07V-K	mm ²	0.5...4	0.5...4	0.5...10	0.5...10
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...2.5	0.5...4	0.5...6	0.5...10
Cable AWG	Nr.	22...14	22...10	20...8	20...8
Plug gauge according to 60 947-7-1	Size	A 3	A 4	A 5	B 6

Ordering data

Version		Qty.		Qty.		Qty.		Qty.
Green/yellow PA		100		100		100		100
Blank								
Two clamping yokes blank								
Hexagon socket blank								

Support block



For insulation of mounting rails
in insulated-earth installations

Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
SH 2	0494920000	10	SH 2	0494920000	10	SH 2	0494920000	10	SH 2	0494920000	10

SK - key, 8mm

Marking tags


	DEK	Standard	Print		DEK	Standard	Print		DEK	Standard	Print			
	1	2	3	4	5	6	DEK 6	see "Accessories"	DEK 6.5	see "Accessories"	DEK 8	see "Accessories"	DEK 5	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* For centre screw

Fuse terminals

KSKM 1 KSKM 1/35



13/69/62
13/69/63
12 mm/-/-

250 V/6.3 A¹⁾/10 mm²

0.5...16

0.5...10

B 6

600 V/10 A/22...8 AWG

Qty. Qty.

9509570000 20 9509600000 20

Type	Cat. No.	Qty.
AP (3)	9509630000	20


5 x 20 mm

0.10 (f)	0430300000	10
0.20 (f)	0430400000	10
0.25 (f)	0430500000	10
0.50 (f)	0430600000	10
1.00 (f)	0430700000	10
1.60 (f)	0430800000	10
2.00 (f)	0430900000	10
2.50 (f)	0431000000	10
3.15 fast	0431100000	10
4.0 fast	0431200000	10
5.0 fast	0431300000	10
6.3 fast	0431400000	10

5 x 20 SBL 0446100000 40

DEK 5 see "Accessories"

KSKM 2 KSKM 2/35



13/69/62
13/69/63
12 mm/-/-

250 V/13 A²⁾/10 mm²

0.5...16

0.5...10

B 6

600 V/15 A/22...8 AWG

Qty. Qty.

9509580000 20 9509610000 20


Type	Cat. No.	Qty.
AP (3)	9509630000	20

1 x 1/4"

1 x 1/4" SBL 0446200000 40

DEK 5 see "Accessories"

KSKM 3 KSKM 3/35



13/69/62
13/69/63
12 mm/-/-

440 V/10 A/10 mm²

0.5...16

0.5...10

B 6

600 V/15 A/22...8 AWG

Qty. Qty.

9509620000 20

Type	Cat. No.	Qty.
AP (3)	9509630000	20

1 1/4 x 1/4"

E 2 A	0294500000	10
E 3 A	0295700000	10
E 5 A	0294600000	10
E 7 A	0295800000	10
E 10 A	0293900000	10


1 1/4 x 1/4" SBL 0446300000 40

DEK 5 see "Accessories"

¹⁾ Max. fuse rating according to DIN 41 660, IEC 127 CEE4 Type 1
²⁾ Fuse according to BS 1362

Fuse terminals

SAKS 3 SAKS 3/35



Dimensions/approvals	
Width/length/height (mm)	with TS 32 13/54/61
Width/length/height (mm)	with TS 35 x 7.5 13/54/55
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 4/5.5 x 1

Rated data/feed through-terminal base	
Rated voltage/current/cross-section	500 V/10 A/10 mm ²
Rated impulse voltage/pollution severity	6 kV/3

Further technical data	
Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4

Clampable conductor	
Solid H07V-U	mm ² 0.5...16
Stranded H07V-R	mm ² 1.5...10
Flexible H07V-K	mm ² 0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...10
Plug gauge according to 60 947-7-1	Size B 6
Continuous current rating of cross-connection 2...5-pole	A (QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A (QL 6...10) 36

Rated data according to UL/CSA	
Voltage/current/conductor size	UL 300 V/10 A/22...10 AWG
Voltage/current/conductor size	CSA 600 V/10 A/22...10 AWG

Ordering data	
Version	Qty. Qty.
KrG	0248920000 ³⁾ 20 0667520000 ³⁾ 20
KrG	0297520000 ⁴⁾ 20 0328920000 ⁴⁾ 20

End plate/partition (thickness mm)	
PA	Type Cat. No. Qty. AP (2.5) 0191320000
HP	for TW (2.0) 0607000000

Cross-connection	
	QL
	SS

Fuse inserts for cross-connections	
Fuse inserts	
1 1/4" x 1/4"	Nominal current (A): 0.5 fast
	1.0 fast
	2.0 fast
	3.0 fast
	5.0 fast
	7.0 fast
	10.0 fast

G fuse inserts 5 x 30 mm (500 V~/0.032...6.3 A).
Available from Wickmann-Werke GmbH,
Annstr. 113, 58453 Witten, Germany, Phone ++492302/6620

D fuse inserts	
	Rated voltage 400 V
	Rated voltage 500 V

Screw cap (spare)	
red	SK (5 x 30) 0282000000 20
black	SK (1/4"x1 1/4") 0428900000 20

Marking tags	
	DEK Standard DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"
*only for TS 32

SAKS 4 SAKS 4/35



Width/length/height (mm)	24/75/73
Width/length/height (mm)	24/75/66
Insulation stripping length/clamping screw/screwdriver blade	14 mm/M 4/5.5 x 1

Rated voltage/current/cross-section	400 V**/16 A/10 mm ²
Rated impulse voltage/pollution severity	6 kV/3

Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4

Solid H07V-U	mm ² 0.5...16
Stranded H07V-R	mm ² 1.5...10
Flexible H07V-K	mm ² 0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...10
Plug gauge according to 60 947-7-1	Size B 6
Continuous current rating of cross-connection 2...5-pole	A (QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A (QL 6...10) 36

Rated data according to UL/CSA	
Voltage/current/conductor size	600 V/30 A/22...8 AWG

Ordering data	
Version	Qty. Qty.
KrG	0321320000 20 0501820000 20
KrG	

End plate/partition (thickness mm)	
Neozed D 01	Type Cat. No. Qty. TW HP (2.0) 0607000000* 20

Cross-connection	
QL 2	0328000000 20
QL 3	0328100000 20
QL 4	0328200000 20
QL 10	0339000000 20

Fuse inserts for cross-connections	
Fuse insert	
	Rated voltage 400 V
	Rated voltage 500 V

G fuse inserts 5 x 30 mm (500 V~/0.032...6.3 A).
Available from Wickmann-Werke GmbH,
Annstr. 113, 58453 Witten, Germany, Phone ++492302/6620

D fuse inserts	
	Rated voltage 400 V
	Rated voltage 500 V

Screw cap (spare)	
red	SK (5 x 30) 0339410000 20
black	SK (1/4"x1 1/4") 0428900000 20

Marking tags	
	DEK Standard DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"
** Also for 440 V- with neozed marina fuse
*** Current for overload up to 10 A, for short circuit up to 25 A

SAKS 5 SAKS 5/35



Width/length/height (mm)	28/80/80.5
Width/length/height (mm)	28/80/66
Insulation stripping length/clamping screw/screwdriver blade	13 mm/M 4/5.5 x 1

Rated voltage/current/cross-section	400 V/63 A***/16 mm ²
Rated impulse voltage/pollution severity	6 kV/3

Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4

Solid H07V-U	mm ² 1.5...16
Stranded H07V-R	mm ² 1.5...16
Flexible H07V-K	mm ² 1.5...16
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 1.5...16
Plug gauge according to 60 947-7-1	Size B 7
Continuous current rating of cross-connection 2...5-pole	A (QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A (QL 6...10) 36

Rated data according to UL/CSA	
Voltage/current/conductor size	600 V/63 A/14...6 AWG

Ordering data	
Version	Qty. Qty.
KrG	0359420000 20 0502120000 20
KrG	

End plate/partition (thickness mm)	
Neozed D 02	Type Cat. No. Qty. TW HP (2.0) 0607000000* 20

Cross-connection	
QL 2	0207800000 20
QL 3	0207900000 20
QL 4	0208000000 20
QL 10	0338900000 20

Fuse inserts for cross-connections	
Fuse ring	
	Rated voltage 400 V
	Rated voltage 500 V

G fuse inserts 5 x 30 mm (500 V~/0.032...6.3 A).
Available from Wickmann-Werke GmbH,
Annstr. 113, 58453 Witten, Germany, Phone ++492302/6620

D fuse inserts	
	Rated voltage 400 V
	Rated voltage 500 V

Screw cap (spare)	
red	SK (5 x 30) 0359310000 20
black	SK (1/4"x1 1/4") 0284110000 20

Marking tags	
	DEK Standard DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"
3) For fuse inserts 1 1/4 x 1/4" DEF 63
4) For fuse inserts 5 x 30

SAKS 2 SAKS 2/35



Width/length/height (mm)	28/80/81.5
Width/length/height (mm)	28/80/75
Insulation stripping length/clamping screw/screwdriver blade	12 mm/M 4/5.5 x 1

Rated voltage/current/cross-section	500 V/10 (25) A***/10 mm ²
Rated impulse voltage/pollution severity	6 kV/3

Tightening torque range	Nm 1.2...2.4
Torque setting with electric screwdriver type DMS 2	4

Solid H07V-U	mm ² 0.5...16
Stranded H07V-R	mm ² 0.5...10
Flexible H07V-K	mm ² 0.5...10
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 0.5...10
Plug gauge according to 60 947-7-1	Size B 6
Continuous current rating of cross-connection 2...5-pole	A (QL 2...5) 47
Continuous current rating of cross-connection 6...10-pole	A (QL 6...10) 36

Rated data according to UL/CSA	
Voltage/current/conductor size	600 V/25 A/22...8 AWG

Ordering data	
Version	Qty. Qty.
KrG	0206820000 20 1368720000 20
KrG	

End plate/partition (thickness mm)	
Diazed E 16	Type Cat. No. Qty. TW HP (2.0) 0607000000* 20

Cross-connection	
QL 2	0207800000 20
QL 3	0207900000 20
QL 4	0208000000 20
QL 10	0338900000 20

Fuse inserts for cross-connections	
Gauge ring	
	Rated voltage 400 V
	Rated voltage 500 V

G fuse inserts 5 x 30 mm (500 V~/0.032...6.3 A).
Available from Wickmann-Werke GmbH,
Annstr. 113, 58453 Witten, Germany, Phone ++492302/6620

D fuse inserts	
	Rated voltage 400 V
	Rated voltage 500 V

Screw cap (spare)	
red	SK (5 x 30) 0284110000 20
black	SK (1/4"x1 1/4") 0428900000 20

Marking tags	
	DEK Standard DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"
*only for TS 32


Fuse terminals

SAKS 4 USA




UL		
24/75/73		
24/75/66		
14 mm/M 4/5.5 x 1		
400 V/30 A/10 mm ²		
6 kV/3		
1.2...2.4		
4		
0.5...16		
1.5...10		
0.5...10		
0.5...10		
B 6		
(QL 2...5) 47		
(QL 6...10) 36		
600 V/30 A/20...8 AWG		
600 V/30 A/22...8 AWG		
Qty. Qty.		
0162220000 20 0178220000 20		
10.3 x 38,1		
Type	Cat. No.	Qty.
TW HP (2.0)	0607000000	20
QL 2	0328000000	20
QL 3	0328100000	20
QL 4	0328200000	20
QL 10	0339000000	20
SS M 4	0136400000	100
BS M 4 x 9	0103300000	100
SK (w. spring)	0161730000	20
DEK 5	see "Accessories"	

Fuse terminals with fault indicator

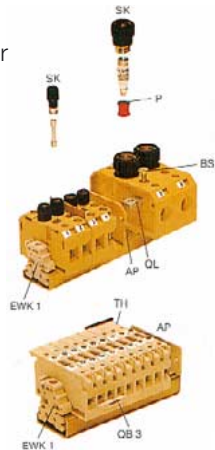

Dimensions/approvals	
Terminal width (+ 0.2 assembly tolerance)	mm 8
Insulation stripping length	mm 9
Connection data	
Screw connection, solid	
Screw connection, flexible/ferrule with/without plastic collar	
Conductor cross-section	
VDE rated data	
Current	
Voltage	
LED-current (24...60 V)	
LED-current (115...230 V)	
LED-current (24...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	
Ordering data	
24 V~	ASK 1 LD 8050810000 25
24 V~	ASK 1 LD 0222760000 25
48 V~	ASK 1 LD 0225260000 25
60 V~	ASK 1 LD 0226460000 25
115 V~	ASK 1 LD 0225460000 25
230 V~	ASK 1 LD 0225660000 25
24 V~	ASK 1 LD 0222860000 25
48 V~	ASK 1 LD 0225360000 25
60 V~	ASK 1 LD 0226360000 25
115 V~	ASK 1 LD 0225560000 25
230 V~	ASK 1 LD 0225760000 25
Mountable on	
TS 32 and TS 35	
Accessories	
Mounting rail	
End brackets (thickness mm)	
for TS 32	
for TS 35	
End plate/End plate (thickness mm)	
Cross-connections	
Type 'QL'	
Cross-connection	
Type 'QB'	
Fixing screw (fits QL)	
Disconnect lever (spare)	
TH (spare) 0377060000 100	
Mounting rails, end brackets, further marking material see "Accessories"	

ASK 1 LD




Warning:
In the event of a faulty fuse, the connection system is live!

UL		
0.5...4 mm ²		
0.5...4 mm ²		
AWG 22...12		
6.3 A		
24...230 V (depending on terminal)		
≤ 2 mA		
≤ 2 mA		
4 mm ²		
Type	Cat. No.	Qty.
ASK 1 LD	8050810000	25
ASK 1 LD	0222760000	25
ASK 1 LD	0225260000	25
ASK 1 LD	0226460000	25
ASK 1 LD	0225460000	25
ASK 1 LD	0225660000	25
ASK 1 LD	0222860000	25
ASK 1 LD	0225360000	25
ASK 1 LD	0226360000	25
ASK 1 LD	0225560000	25
ASK 1 LD	0225760000	25
Mountable on		
TS 32 and TS 35		
Accessories		
Mounting rail		
End brackets (thickness mm)		
for TS 32		
for TS 35		
End plate/End plate (thickness mm)		
Cross-connections		
Type 'QL'		
Cross-connection		
Type 'QB'		
Fixing screw (fits QL)		
Disconnect lever (spare)		
TH (spare) 0377060000 100		

KDKS 1

Fuse insert 5x20

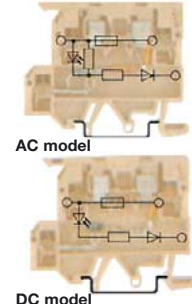

Warning:
In the event of a faulty fuse, the connection system is live!

UL		
0.5...4 mm ²		
0.5...4 mm ²		
AWG 22...12		
6.3 A		
24...230 V (depending on terminal)		
≤ 2 mA		
≤ 2 mA		
4 mm ²		
Type	Cat. No.	Qty.
KDKS 1	8146450000	25
KDKS 1	8148930000	25
KDKS 1	8148920000	25
KDKS 1	8142840000	25
KDKS 1	8148910000	25
Mountable on		
TS 32 and TS 35		
Accessories		
Mounting rail		
End brackets (thickness mm)		
for TS 32		
for TS 35		
End plate/End plate (thickness mm)		
Cross-connections		
Type 'QL'		
Cross-connection		
Type 'QB'		
Fixing screw (fits QL)		
Disconnect lever (spare)		
TH (spare) 0377060000 100		

SAK-series

¹⁾When using QB, the rated cross-current reduces to max. 2.5 mm²

Fuse terminals

with fault indicator




Dimensions/approvals	
Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Ordering data	Voltage	Qty.
Fuse insert		
5 x 20 LED	24 V~	
Acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)	24 V~	
without indicator	48 V~	
	48 V~	
	Incandescent lamp 24 V=	
	48 V=	
	Neon lamp 115 V=	
	230 V=	
Fuse insert		
5 x 25 LED	24 V~	
Acc. to DIN 41576		
without indicator	Incandescent lamp 48 V=	
	Neon lamp 115 V=	
	230 V=	

Accessories	
Mounting rail	
End brackets (thickness mm)	for TS 32 for TS 35
End plate (thickness mm)	
Cross-connection	
Type 'QL'	
Cross-connection	
Type 'QB'	
Fixing screw (fits QL)	
Screw cap (spare)	
Neon lamp	

SAKS 1

Fuse insert 5x20/5x25



Warning:
In the event of a faulty fuse, the connection system is live!


Dimensions/approvals	
Width/length/height (mm)	
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Type	Cat. No.	Qty.
SAKS 1 LD		
5 x 20 LED	0371420000	10 0225820000 10
Acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)	1111220000	10 1111320000 10
without indicator		
		0214020000 10
SAKS 1 GL		
	0173220000	10
	0378920000	10
SAKS 1 GL		
Neon lamp 115 V=	0385320000	10 8068330000 10
230 V=	0306120000	10 0199920000 10
SAK 1 LD		
on demand		
SAKS GL		
on demand		
SAKS 1 GL		
	0309320000	10 0198620000 10

Type	Cat. No.	Qty.
TS 32	0122800000	
TS 35x7.5	0383400000	
TS 35x15	0498000000	
EWK 1 (8.5)	0206160000	50
EW 35 (8.5)	0383560000	50
AP KrG (3)	0191320000	20
SK (5 x 20)	0282100000	20
SK (5 x 25)	0282000000	100

SAKS 4

Fuse insert E14/D 01
(e.g. Neozed D 01)



Warning:
In the event of a faulty fuse, the connection system is live!


Dimensions/approvals	
Width/length/height (mm)	
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Type	Cat. No.	Qty.
SAKS 4		
TS 32 Neon lamp		
Voltage		
115 V=	0101820000	10
480 V=	0102120000	10

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50

SAKS 6

Fuse insert 11/4" x 1/4"
acc. to DEF 63



Warning:
In the event of a faulty fuse, the connection system is live!


Dimensions/approvals	
Width/length/height (mm)	
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Type	Cat. No.	Qty.
SAKS 6 KrG	0531820000	40
for 1 1/4" x 1/4" acc. to DEF 63		
Voltage		
115 V=	0101820000	10
480 V=	0102120000	10
exchangeable neon lamps (please order separately)		

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50
AP KrG	0146720000	20
QL 2	0191400000	50
QL 3	0191500000	50
QL 4	0191600000	20
QL 10	0338800000	20
BSM 3x6 m.SS	0346200000	100
Neon lamp 230 V~	0550300000	
Neon lamp 115 V~	0550200000	

SAKS 7

Fuse insert 5x20/5x25



Warning:
In the event of a faulty fuse, the connection system is live!





Dimensions/approvals	
Width/length/height (mm)	
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	
Connection data	
Screw connection, solid	
Screw connection, flexible	
Conductor cross-section	
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
VDE rated data	
Voltage/current	
LED-current (24...60 V)	
LED-current (115...230 V)	
Incandescent lamp-current	
Neon lamp-current	
Cross-section	

Type	Cat. No.	Qty.
SAKS 7 KrG		
for 5 x 25	0576120000	40
SAKS 7 KrG		
for 5 x 20	0573120000	40
exchangeable neon lamps (please order separately)		

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50
AP KrG (3)	0146720000	20
QL 2	0207800000	20
QL 3	0207900000	20
QL 4	0208000000	20
QL 10	0338900000	20
BSM 4x9 m.SS	0133300000	100
Neon lamp 230 V~	0550300000	
Neon lamp 115 V~	0550200000	

Fuse inserts and gauge rings for Weidmüller fuse terminals




Fuse inserts

for terminal type	Size (mm)	Rated voltage (V)	Rated current (A)	Type	Cat. No.	Qty.			
G fuse inserts 5 x 20 without indicator acc. to IEC 60127-2 (VDE 0820 T.2 Bl 1)									
SAKS 1	5 x 20 Breaking capacity 1500 A (at 250 V, 50 Hz, cos φ = 0.7)	250	0.1 (F)	G 20/0.10A/F	0430300000	10			
SAKS 7			0.2 (F)	G 20/0.20A/F	0430400000	10			
ASK 1			0.25 (F)	G 20/0.25A/F	0430500000	10			
WSI 6 			0.5 (F)	G 20/0.50A/F	0430600000	10			
			0.63 (F)	G 20/0.63A/F	0430900000	10			
			1.0 (F)	G 20/1.00A/F	0430700000	10			
			1.6 (F)	G 20/1.60A/F	0430800000	10			
			2.0 (F)	G 20/2.00A/F	0430900000	10			
			2.5 (F)	G 20/2.50A/F	0431000000	10			
			3.15 (F)	G 20/3.15A/F	0431100000	10			
			4.0 (F)	G 20/4.00A/F	0431200000	10			
			5.0 (F)	G 20/5.00A/F	0431300000	10			
			6.3 (F)	G 20/6.30A/F	0431400000	10			
G fuse inserts 5 x 25 with indicator acc. to DIN 41576¹⁾									
SAKS 1	5 x 25 m. K.1) Breaking capacity 80 A (at 250 V, 50 Hz, cos φ = 1)	250	0.25 (M)	G 25/0.25A/M	0546900000	10			
SAKS 7			0.5 (M)	G 25/0.50A/M	0510300000	10			
WSI 6 			0.8 (M)	G 25/0.80A/M	0646400000	10			
			1 (M)	G 25/1.00A/M	0265800000	10			
			10 (M) ⁵⁾	G 25/10.0A/M	0193100000	10			
			2 (F)	G 25/2.00A/F	0192700000	10			
			4 (F)	G 25/4.00A/F	0192800000	10			
			6.3 (F)	G 25/6.30A/F	0192900000	10			
			Fuse inserts 1 1/4" x 1/4" without indicator acc. to BS 88						
			SAKS 3 ²⁾	33 kA Breaking capacity 33 kA fast	440	E 0.5 A	GZ 0.5A/F	0533800000	10
SAKS 6 	E 1 A	GZ 1.0A/F	0525500000			10			
	E 2 A	GZ 2.0A	0294500000			10			
	E 3 A	GZ 3.0A	0295700000			10			
	E 5 A	GZ 5.0A	0294600000			10			
	E 7 A	GZ 7.0A	0295800000			10			
	E 10 A	GZ 10.0A	0293900000			10			
D fuse inserts E 16 with indicator acc. to DIN 49360 (diazed)									
SAKS 2 	E 10 A E 16 A E 20 A E 25 A	500	10	E 16/10A RT	0208500000	25			
			16	E 16/16A GR	0208600000	25			
			20	E 16/20A BL	0208700000	25			
			25	E 16/25A GE	0208800000	25			
D fuse inserts E 14 Size D 01 and E 18 size D 02 with indicator acc. to DIN 49522 (neozed)³⁾									
SAKS 4 ⁴⁾ 	E 14/2 E 14/4 E 14/6 E 14/10 E 14/16 E 18/20	400	2	E 14/2A RS	0137400000	10			
			4	E 14/4A BR	0137500000	10			
			6	E 14/6A GN	0328300000	10			
			10	E 14/10A RT	0328400000	10			
			16	E 14/16A GR	0328500000	10			
			20	E 18/20A BL	0361300000	10			
SAKS 5 	E 18/25 E 18/35 E 18/50 E 18/63	400	25	E 18/25A GE	0361400000	10			
			35	E 18/35A SW	0361500000	10			
			50	E 18/50A WS	0361600000	10			
			63	E 18/63A KU	0361700000	10			

(F) = fast
(M) = medium-delayed action

- Note:**
- 1) The SIBA company also supplies 5 x 25 G fuse inserts with indicators in a shipbuilding model for 450 V AC.
 - 2) 5 x 30 (500 V AC) fuse inserts for SAKS 3 are available from the WICKMANN company
 - 3) The LINDNER company also supplies neozed fuse cartridges in an additional shipbuilding mode for 440 V AC.
 - 4) Fuse cartridges with the dimensions 1"x1/4" ≅ 25.4x6.35 mm and 13/32"x1 1/8" ≅ 10.3x38.1 mm are not included in product line.
 - 5) Only for SAKS 1 and SAKS 7.

Gauge rings


For terminal type	Gauge ring type	Amp.	Colour	Type	Cat. No.	Qty.
SAKS 4 and 4/35 	P 14/2	2	Pink	P 14/2D01 RS	0138000000	50
	P 14/4	4	Brown	P 14/4D01 BR	0138100000	50
	P 14/6	6	Green	P 14/6D01 GN	0328600000	50
	P 14/1	10	Red	P 14/10D01 RT	0328700000	50
	SAKS 5 and 5/35 	P 18/20	20	Blue	P 18/20D02 BL	0361800000
P 18/25		25	Yellow	P 18/25D02 GE	0361900000	50
P 18/35		35	Black	P 18/35D02 SW	0362000000	50
P 18/50		50	White	P 18/50D02 WS	0362100000	50
SAKS 2 and 2/35 		P 16/10	10	Red	P 16/10 RT	0208900000
	P 16/16	16	Grey	P 16/16 GR	0209000000	100
	P 16/20	20	Blue	P 16/20 BL	0209100000	100

Disconnect test terminals


SAKR SAKR/35




SAKR-D SAKR-D/35



DKT 4 DKT 4/35



DKT 4 V DKT 4 V/35



Dimensions/approvals									
Width/length/height (mm) with TS 32		6.5/42/40.5/54.5 (opened)		6.5/42/40.5/57 (with DLS 2)		6/65/56.5/70 (opened)		6/65/56.5/70 (opened)	
Width/length/height (mm) with TS 35 x 7.5		6.5/46/38/52		6.5/46/38/54.5		6/65/56.5/70		6/65/56.5/70	
Insulation stripping length/clamping screw/screwdriver blade		8 mm/M 3/3.5 x 0.6		8 mm/M 3/3.5 x 0.6		9 mm/M 3/3.5 x 0.6		9 mm/M 3/3.5 x 0.6	
Rated data									
Rated voltage/current/cross-section		400 V ⁵⁾ /10 A/4 mm ²		400 V/10 A/4 mm ²		400V/10 A/4 mm ²		400 V/10 A/4 mm ²	
Rated impulse voltage/pollution severity		6 kV/3		6 kV/3		6 kV/3		6 kV/3	
Further technical data									
Tightening torque range Nm		0.5...1.0/0.5 StB		0.5...1.0/0.5 StB		0.5...1.0/0.5 StB		0.5...1.0/0.5 StB	
Torque setting with electric screwdriver type DMS 2		2/1		2/1		2/1		2/1	
Clampable conductor									
Solid H07V-U mm ²		0.5...4		0.5...4		0.5...4		0.5...4	
Stranded H07V-R mm ²		1.5...4		1.5...4		1.5...4		1.5...4	
Flexible H07V-K mm ²		0.5...4		0.5...4		0.5...4		0.5...4	
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²									
With/without plastic insulating collar mm ²		0.5...4		0.5...4		0.5...4		0.5...4	
Plug gauge according to 60 947-7-1 Size		A 3		A 3		A 3		A 3	
Continuous current rating of cross-connection 2...5-pole A		(QB 2...25) 10		(QB 2...25) 10		(QB 2...4) 10		(QB 2...4) 10	
Continuous current rating of cross-connection 6...10-pole A									
Rated data according to UL/CSA									
Voltage/current/conductor size UL		300 V/10 A/26...12 AWG		300 V/10 A/26...12 AWG		300 V/10 A/22...12 AWG		300 V/10 A/22...12 AWG	
Voltage/current/conductor size CSA		300 V/10 A/26...12 AWG		300 V/10 A/22...12 AWG		300 V/10 A/26...12 AWG		300 V/10 A/26...12 AWG	
Ordering data		Type Qty.		Type Qty.		Type Qty.		Type Qty.	
		KRG 0412120000 100							
		PA 0412160000 100 0172160000 100		0412960000 ¹⁾ 100 0299960000 ²⁾ 50		0687360000 50 0687460000 50			
Without diode PA				0413060000 ³⁾ 50 0185760000 ³⁾ 50					
With diode PA				0263660000 ³⁾ 50 0299560000 ³⁾ 50					
Blue PA		0412180000 100 0172180000 100							
Orange PA		1461960000 100							
With 2 StB ⁵⁾		KRG 0412220000 100							
With 2 StB ⁵⁾		PA 0412260000 100 0183360000 100		0546460000 ¹⁾ 100		0327860000 50 0327960000 50		1304860000 50 1304960000 50	
With 2 StB ⁵⁾		without diode PA		0413160000 ²⁾ 50					
With 2 StB ⁵⁾		Blue 0412280000 100 0183380000 100							
End plate (thickness mm)		Type Cat. No. Qty.		Type Cat. No. Qty.		Type Cat. No. Qty.		Type Cat. No. Qty.	
		KRG AP (1.5) 0211320000 20		AP (1.5) 0211360000 20		AP (1.5) 0687560000 20		AP (1.5) 0687560000 20	
		PA AP (1.5) 0211360000 20							
		Blue PA AP (1.5) 0211380000 20							
Partition (thickness mm)									
		TW HP (1.0) 0297100000 20		TW HP (1.0) 0297100000 20		TW HP (2.0) 0607000000 20		TW HP (2.0) 0607000000 20	
Cross-connection									
QB 4		2-pole QB 2 ⁴⁾ 0482700000 100		QB 2 ⁴⁾ 0482700000 100		QB 2 ⁴⁾ 0482700000 100		QB 2 ⁴⁾ 0482700000 100	
		3-pole QB 3 ⁴⁾ 0482800000 50		QB 3 ⁴⁾ 0482800000 50		QB 3 ⁴⁾ 0482800000 50		QB 3 ⁴⁾ 0482800000 50	
		4-pole QB 4 ⁴⁾ 0482900000 50		QB 4 ⁴⁾ 0482900000 50		QB 4 ⁴⁾ 0482900000 50		QB 4 ⁴⁾ 0482900000 50	
		25-pole QB 25 blank ⁴⁾ 0134000000 20		QB 25 blank ⁴⁾ 0134000000 20					
Contact sleeve (spare)									
Test plug									
		PS 2.3 0180400000 20		PS 2.3 0180400000 20		PS 2.3 0180400000 20		PS 2.3 0180400000 20	
Diode plug (spare)									
without diode				DLS 2 0321060000 50					
with diode 1N4007				DLS 2 + 0630160000 50					
with diode 1N4007				DLS 2 - 0547760000 50					
with jumper				DLS 2 0547660000 25					
Marking tags		Print		Print		Print		Print	
		DEK Standard		DEK 6.5 see "Accessories"		DEK 6 see "Accessories"		DEK 6 see "Accessories"	
Mounting rails, end brackets, further marking material see "Accessories"									


¹⁾ without DLS
²⁾ with DLS empty

³⁾ with DLS 1N4007
⁴⁾ When using QB the rated cross-current reduces to max. 2.5 mm²

⁵⁾ With DKT 4 only on upper terminal level
⁶⁾ As disconnect test terminal rated voltage 250 V

Disconnect test terminals

ASK 1 ASK 1/35



RU @

8/58/49

8/58/44

9 mm/M 3/3.5 x 0.6

500 V/19 A/4 mm²

6 kV/3

0.5...1.0

2

0.5...4

1.5...4

0.5...4

0.5...4

A 3

(QB 2...4) 10

300 V/15 A/12 max. AWG

300 V/6.3 A/26...12 AWG

Qty.

0456360000 100

0105260000 100

Type	Cat. No.	Qty.
------	----------	------

AP (1.5)	0380360000	20
----------	-------------------	----

TW HP (2.0)	0607000000	20
-------------	-------------------	----

QB 2 ⁴)	0461100000	100
---------------------	-------------------	-----

QB 3 ⁴)	0461200000	50
---------------------	-------------------	----

QB 4 ⁴)	0461300000	50
---------------------	-------------------	----

multipole interruptable with group marking carrier SchS 2; 2-pole (Cat. No. **1359500000**) 1000 mm (Cat. No. **0337400000**)


K sleeve	0553300000	100
----------	-------------------	-----

DEK 5 FW	see "Accessories"	
----------	-------------------	--

Feed-through terminals with tab connection

AST 1 AST1/35

6.3
2.8



UL @ DNV

Dimensions/approvals	
Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

6.5/58/53.5
6.5/58/46

AST 3 AST 3/35

6.3
2.8



UL @ DNV

6.5/40/47.5
6.5/44/40

AST 4 AST 4/35

6.3
2.8




UL @

6.5/40/47.5
6.5/44/40
9 mm/M 2.5/3.5 x 0.6

AST 5 AST 5/35

6.3
2.8



UL @ DNV

6.5/58/53.5
6.5/58/46
12 mm/M 3/3.5 x 0.6

Rated data	
Rated voltage/-current	500 V ¹⁾ /-
Rated cross-section for clamping yokes	-
Rated cross-section tab	6.3/2.8 mm
Rated Voltage VDE 0110/1.89/pollution severity	6 kV/3
Further technical data	
Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	
Clampable conductor	
Solid H07V-U	mm ²
Stranded H07V-R	mm ²
Flexible H07V-K	mm ²
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²
Plug gauge according to 60 947-7-1	Size
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2...5-pole	A
Continuous current rating of cross-connection 6...10-pole	A

Rated data according to UL/CSA	
Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA
Ordering data	
	Version
	Slotted KrG
	Slotted blue KrG
	Slotted PA
	Unslotted KrG
	Unslotted blue KrG
	Unslotted PA

Type	Cat. No.	Qty.
AP (3.0)	0266420000	20
AP (1.5)	0266460000	20
PA	0474700000	20
HP	0607000000	20
HP	0319160000	100

Type	Cat. No.	Qty.
AP (3.0)	0298120000	20
AP (1.5)	0460560000	20
TW (1.5)	0130160000	20
TW (1.0)	0297100000	20
TSch 1	0319160000	100

Type	Cat. No.	Qty.
AP (3.0)	0298120000	20
AP (1.5)	0460560000	20
TW (1.5)	0130160000	20
TW (1.0)	0297100000	20
TSch 1	0319160000	100

Type	Cat. No.	Qty.
AP (3.0)	0266420000	20
AP (1.5)	0266460000	20
TW (1.0)	0474700000	20
TW (2.0)	0607000000	20
TSch 1	0319160000	100

End plate/partition/small partition (thickness mm)		
AP	TW	TSCH 1
		KrG
		Blue KrG
		PA
		HP
		HP
Only for PA		
		TSch 1

Cross-connection	
Q4	2-pole
	3-pole
	4-pole
	10-pole
	25-pole

Plug adapter	
	2-pole
	3-pole
	4-pole
	5-pole
	8-pole

Test plug/socket	
	Plug-test socket without using QL for TS 32
	PS
	StB

Insulation sleeve	
	IH 2.8
	IH 6.3

Marking tags	
	Print
	DEK
	Standard

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ with insulation sleeve
²⁾ shock proof with ADP 4 cover profiles ADP4 (see section "Accessories")

Feed-through terminals with tab connection

SAK 4 S SAK 4 S/35

6.3
2.8



SAK 4 SS SAK 4 SS/35

6.3
2.8



SAKR F SAKR F/35

2.8



Dimensions/approvals

Width/length/height (mm)	with TS 32	6.5/40/51.5
Width/length/height (mm)	with TS 35 x 7.5	6.5/40/49.5
Insulation stripping length/clamping screw/screwdriver blade		12 mm/M 3/3.5 x 0.6

Rated data

Rated voltage/-current		500 V ¹⁾ /16 A
Rated cross-section for clamping yokes		4 mm ²
Rated cross-section tab	6.3/2.8 mm	2.5/1.0 mm ²
Rated Voltage VDE 0110/1.89/pollution severity		6 kV/3

Further technical data

Tightening torque range	Nm	0.5...1.0
Torque setting with electric screwdriver type DMS 2		2

Clampable conductor

Solid H07V-U	mm ²	0.33...6
Stranded H07V-R	mm ²	1.5...4
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	0.5...4
Plug gauge according to 60 947-7-1	Size	A 4

Continuous current of terminal for conductor size		
Continuous current rating of cross-connection 2 pole	A	(QL 2...10) 36 A at 6 mm ²
Continuous current rating of cross-connection multipole	A	

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/13 A/26...12 AWG
Voltage/current/conductor size	CSA	300 V/13 A/26...12 AWG

Ordering data

Version

Slotted KrG	Qty.	0401220000	100
Slotted blue KrG	Qty.		
Slotted PA	Qty.	0401260000	100
Unslotted KrG	Qty.	0630360000	100

End plate/partition/small partition (thickness mm)

Type	Cat. No.	Qty.
AP (1.5)	0117920000	20
AP (1.5)	0117960000	20
AP (1.5)	0130160000	20
TW (1.0)	0297100000	20



Cross-connection

Type	Cat. No.	Qty.
QL 2	0130600000	100
QL 3	0130700000	100
QL 4	0130800000	50
QL 10	0338200000	20



BS M 3 x 4.5	1593210000	100
--------------	------------	-----



Test plug/socket




Insulation sleeve



Marking tags

DEK	Standard	DEK 6.5	see "Accessories"
-----	----------	---------	-------------------



Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ With insulation sleeve

¹⁾ The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used

Feed-through terminals with tab connection

DK 4 SS/35



DK 4 SS/35 only 2.8



DK 4 S DK 4 S/35



DK 4 S only 2.8 DK 4 S/35 only 2.8



Dimensions/approvals		UL	CS	LR	UL	UL	CS	LR	UL	CS	
Width/length/height (mm)	with TS 32	6/54/60.5		6/54/60.5		6/54/59.5		6/54/59.5		6/54/60.5	
Width/length/height (mm)	with TS 35 x 7.5	6/54/60.5		6/54/60.5		6/54/60.5		6/54/60.5		6/54/60.5	
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6		9 mm/M 3/3.5 x 0.6		9 mm/M 3/3.5 x 0.6		9 mm/M 3/3.5 x 0.6		9 mm/M 3/3.5 x 0.6	
Rated data		400 V ¹ /2 x 16 A		400 V ¹ /2x10		400 V ¹ /2 x 10		400 V ¹ /2 x 10		400 V ¹ /2 x 10	
Rated cross-section for clamping yokes		-		-		4 mm ²		4 mm ²		4 mm ²	
Rated cross-section tab	6.3/2.8 mm	2.5/1.0 mm ²		1.0 mm ²		1.0 mm ²		1.0 mm ²		1.0 mm ²	
Rated Voltage VDE 0110/1.89/pollution severity		8 kV/3		4 kV/3		6 kV/3		6 kV/3		6 kV/3	
Further technical data											
Tightening torque range	Nm					0.5...1.0		0.5...1.0		0.5...1.0	
Torque setting with electric screwdriver type DMS 2						2		2		2	
Clampable conductor											
Solid H07V-U	mm ²					0.5...4		0.5...4		0.5...4	
Stranded H07V-R	mm ²					1.5...4		1.5...4		1.5...4	
Flexible H07V-K	mm ²					0.5...4		0.5...4		0.5...4	
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²										
With/without plastic insulation collar						0.5...4		0.5...4		0.5...4	
Plug gauge according to 60 947-7-1	Size					A 3		A 3		A 3	
Continuous current of terminal for conductor size											
Continuous current rating of cross-connection 2 pole	A	(QL 2...10) 20		(QL 2...10) 20		(QL 2...10) 20		(QL 2...10) 20		(QL 2...10) 20	
Continuous current rating of cross-connection multipole	A										
Rated data according to UL/CSA											
Voltage/current/conductor size	UL	300 V/10 A/22...12 AWG		300 V/10 A/22...12 AWG		300 V/10 A/22...12 AWG		300 V/10 A/22...12 AWG		300 V/10 A/22...12 AWG	
Voltage/current/conductor size	CSA	300 V/10 A/22...12 AWG		300 V/10 A/22...12 AWG		300 V/10 A/22...12 AWG		300 V/10 A/22...12 AWG		300 V/10 A/22...12 AWG	
Ordering data		Version									
	PA										
			Cat. No.	Qty.							
			0217160000	100			0297060000	100		0631260000	100
							0686660000	100		0631600000	100
										0686560000	100

End plate (thickness mm)	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
PA	AP (1.5)	0631360000	20	AP (1.5)	0631360000	20	AP (1.5)	0631360000	20	AP (1.5)	0631360000	20



Partition	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
for TS 32 HP	TW HP (2.0)	0607000000	20	TW HP (2.0)	0607000000	20	TW HP (2.0)	0607000000	20	TW HP (2.0)	0607000000	20



Small partition	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
TSch 6	TSch 6	0190260000	100	TSch 6	0190260000	100	TSch 6	0190260000	100	TSch 6	0190260000	100



Cross-connection	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
Q 3	2-pole	Q 2	0336400000	50	Q 2	0336400000	50	Q 2	0336400000	50	Q 2	0336400000	50
	3-pole	Q 3	0336500000	50	Q 3	0336500000	50	Q 3	0336500000	50	Q 3	0336500000	50
	4-pole	Q 4	0336600000	50	Q 4	0336600000	50	Q 4	0336600000	50	Q 4	0336600000	50
	10-pole	Q 10	0368600000	20	Q 10	0368600000	20	Q 10	0368600000	20	Q 10	0368600000	20



Test plug/socket	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
Plug test socket without using QL	StB	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50
Plug test socket for use with QL	PS	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20



Insulation sleeve	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100	PS 2.3	0180400000	20
	IH 6.3	0386260000	100	IH 6.3	0386260000	100	IH 6.3	0386260000	100	IH 2.8	0386060000	100



Marking tags	Print	Type	Cat. No.	Print	Type	Cat. No.	Print	Type	Cat. No.	Print	Type	Cat. No.
1 2 3 4 5 6	DEK	Standard	DEK 6	see "Accessories"	DEK 6	see "Accessories"	DEK 6	see "Accessories"	DEK 6	see "Accessories"	DEK 6	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

1) With insulation sleeve

Feed-through terminals for wrap termination

DIN 41 611, Part 2 and
for spring-clip termination
DIN 41 611, Part 4

SAK 2.5 T

Pin 1 x 1



SAK 2.5 T

Pin 0.8 x 1.6



SAK 2.5 T

Pin 0.8 x 2.4



Dimensions/approvals		Ⓒ	Ⓒ	Ⓒ
Width/length/height (mm)	with TS 32	6/36.5/47.5/67	6/36.5/47.5/62	6/36.5/47.5/69
Insulation stripping length/clamping screw/screwdriver blade		12 mm/M 2.5/3.5 x 0.6	12 mm/M 2.5/3.5 x 0.6	12 mm/M 2.5/3.5 x 0.6
Rated data				
Rated voltage/current/cross-section		250 V/8 A/2.5 mm ²	250 V/10 A/2.5 mm ²	250 V/10 A/2.5 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity		4 kV/3	4 kV/3	4 kV/3
Further technical data				
Tightening torque range	Nm	0.4...0.7	0.4...0.7	0.4...0.7
Torque setting with electric screwdriver type DMS 2		1	1	1
Clampable conductor				
Solid H07V-U	mm ²	0.5...6	0.5...6	0.5...6
Stranded H07V-R	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Flexible H07V-K	mm ²	0.5...4	0.5...4	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Plug gauge according to IEC 60 947-1	Size	A 3	A 3	A 3
Continuous current of terminal for conductor size				
Continuous current rating of cross-connection 2-pole	A	(Q 2...10) 24	(Q 2...10) 24	(Q 2...10) 24
Continuous current rating of cross-connection multipole	A			
Rated data according to UL/CSA				
Voltage/current/conductor size	UL			
Voltage/current/conductor size	CSA	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG
Ordering data		Pin	Version	
	Right		KrG	0108520000 100
	Horizontal right		KrG	0485920000 100
	Vertical left		KrG	0478820000 100
	Vertical right		KrG	0371020000 100
	2x vertical		KrG	0485020000 100
Right		PA	0108560000 ¹⁾ 100	
End plate (thickness mm)		Type	Cat. No.	Qty.
	KrG	AP (1.5)	0279520000	20
	PA	AP (1.5)	0279560000	20
AP (1.5)	KrG	AP (1.5)	0279520000	20
	PA	AP (1.5)	0279560000	20
Partition (thickness mm)		Type	Cat. No.	Qty.
	KrG	TW (2.5)	0302820000	20
	PA	TW (1.5)	0302860000	20
	HP	TW (0.5)	0197100000	20
	HP	TW (2.0)	0607000000	20
TSch 1	KrG	TSch 1	0319160000	100
	PA	TSch 1	0319160000	100
	2-pole	Q 2	0337000000	50
	3-pole	Q 3	0337100000	50
	4-pole	Q 4	0337200000	50
	10-pole	Q 10	0368700000	20
	Q 2**	0337000000	50	
Q 3**	0337100000	50		
Q 4**	0337200000	50		
Q 10**	0368700000	20		
Test plug/socket		Plug-test socket without using QL		
	PS	StB	StB 8.5 (ø 2.3)	0280600000 50
	PS 2.3	StB	PS 2.3	0180400000 20
	DEK	Standard	DEK 6	see "Accessories"
	DEK	Standard	DEK 6	see "Accessories"

** Not for Type 2 x vertical"

¹⁾ Shock-proof with ADP4 cover profile (see section "Accessories")

Feed-through terminals

Disconnect terminals for wrap connection acc. to DIN 41 611, Part 2 and for spring-clip connection acc. to DIN 41 611, Part 4

DK 4 T
Pin 1 x 1



DK 4 T
Pin 0.8 x 1.6



DK 4 T
Pin 0.8 x 2.4



SAKRT
Pin 1 x 1/0.8 x 2.4 and 0.8 x 1.6



Dimensions

Width/length/height (mm) with TS 32
Insulation stripping length/clamping screw/screwdriver blade

6/50/58.5/75.5
9 mm/M 3/3.5 x 0.6

6/50/60.5/77.5
9 mm/M 3/3.5 x 0.6

6/50/67.5/84.5
9 mm/M 3/3.5 x 0.6

6/42/40.5/54.5
8 mm/M 3/3.5 x 0.6

Rated data

Rated voltage/current/cross-section
Rated impulse voltage VDE 0110/1.89/pollution severity

250 V/8 A/4 mm²
4 kV/3

250 V/10 A/4 mm²
4 kV/3

250 V/10 A/4 mm²
4 kV/3

250 V/6/8 A/4 mm²
4 kV/3

Further technical data

Tightening torque range Nm
Torque setting with electric screwdriver type DMS 2

0.5...1.0
1

0.5...1.0
1

0.5...1.0
1

0.5...1.0
2

Clampable conductor

Solid H07V-U mm²
Stranded H07V-R mm²
Flexible H07V-K mm²
Flexible H07V-K and ferrule according to DIN 46 228/1
With/without plastic insulating collar mm²
Plug gauge according to IEC 60 947-1 Size

0.5...4
1.5...4
0.5...4
0.5...4
A3

0.5...4
1.5...4
0.5...4
0.5...4
A3

0.5...4
1.5...4
0.5...4
0.5...4
A3

0.5...4
1.5...4
0.5...4
0.5...4
A3

Continuous current of terminal block for conductor size
Continuous current rating of cross-connection 2-pole
Continuous current rating of cross-connection multipole

(Q 2...10) 32
(Q 2...10) 32

(Q 2...10) 32
(Q 2...10) 32

(Q 2...10) 32
(Q 2...10) 32

(QB 2...10) 10
(QB 2...10) 10

Rated data according to UL/CSA

Voltage/current/conductor size UL
Voltage/current/conductor size CSA

—
—

—
—

—
—

—
—

Ordering data

Pin	Type	Cat. No.	Qty.
Right	PA	0536560000	50
Links	PA		
Horizontal right	PA		
Horizontal assembly	Vertical right		
Vertical assembly	Vertical right		
	Vertical right		
	Vertical left		

Type	Cat. No.	Qty.
Right	0536560000	50
Links		
Horizontal right		
Horizontal assembly		
Vertical assembly		

Type	Cat. No.	Qty.
Right		
Links		
Horizontal right	0370460000 ¹⁾	50
Horizontal assembly		
Vertical assembly		
	0370360000 ¹⁾	

Type	Cat. No.	Qty.
Right		
Links		
Horizontal right		
Horizontal assembly		
Vertical assembly		
	0527760000 ¹⁾	50

Type	Cat. No.	Qty.
Right		
Links		
Horizontal right		
Horizontal assembly		
Vertical assembly		

DK 4 QT

bridgeable on both levels

Right PA

1398460000¹⁾ 50

End plate/partition (thickness mm)

Type	Cat. No.	Qty.
PA	AP (1.5) 0359260000	20
	AP (DK4 QT) 1397160000	20
Blue PA	AP (1.5) 0359280000	20
	TW (2.0) 0607000000	20

Type	Cat. No.	Qty.
PA	AP (1.5) 0359260000	20
Blue PA	AP (1.5) 0359280000	20
	TW (2.0) 0607000000	20

Type	Cat. No.	Qty.
PA	AP (1.5) 0359260000	20
Blue PA	AP (1.5) 0359280000	20
	TW (2.0) 0607000000	20

Type	Cat. No.	Qty.
PA	AP (1.5) 0359260000	20
Blue PA	AP (1.5) 0359280000	20
	TW (2.0) 0607000000	20

Type	Cat. No.	Qty.
PA	AP (1.5) 0211360000	20
Blue PA	AP (1.5) 0211360000	20
	TW (2.0) 0607000000	20

Small partition

Type	Cat. No.	Qty.
TSch 4	TSch 4 0363360000	100

Type	Cat. No.	Qty.
TSch 4	TSch 4 0363360000	100

Type	Cat. No.	Qty.
TSch 4	TSch 4 0363360000	100

Type	Cat. No.	Qty.
TSch 4	TSch 4 0363360000	100

Type	Cat. No.	Qty.
TSch 4	TSch 4 0363360000	100

Cross-connection/covers

Type	Cat. No.	Qty.
Q 3	Q 2 0336400000	50
	Q 3 0336500000	50
	Q 4 0336600000	50
	Q 10 0368600000	20
	QB 2* 0482700000	100
	QB 3* 0482800000	50
	QB 4* 0482900000	50
25-pole		

Type	Cat. No.	Qty.
Q 3	Q 2 0336400000	50
	Q 3 0336500000	50
	Q 4 0336600000	50
	Q 10 0368600000	20
	QB 2* 0482700000	100
	QB 3* 0482800000	50
	QB 4* 0482900000	50

Type	Cat. No.	Qty.
Q 3	Q 2 0336400000	50
	Q 3 0336500000	50
	Q 4 0336600000	50
	Q 10 0368600000	20
	QB 2* 0482700000	100
	QB 3* 0482800000	50
	QB 4* 0482900000	50

Type	Cat. No.	Qty.
Q 3	Q 2 0336400000	50
	Q 3 0336500000	50
	Q 4 0336600000	50
	Q 10 0368600000	20
	QB 2* 0482700000	100
	QB 3* 0482800000	50
	QB 4* 0482900000	50

Type	Cat. No.	Qty.
Q 3	Q 2 0336400000	50
	Q 3 0336500000	50
	Q 4 0336600000	50
	Q 10 0368600000	20
	QB 2* 0482700000	100
	QB 3* 0482800000	50
	QB 4* 0482900000	50
	QB 25 blank* 0134000000	20

Test plug/socket

Type	Cat. No.	Qty.
StB	StB 8.5 (ø23) 0215700000	50
PS	PS 2.3 0180400000	20

Type	Cat. No.	Qty.
StB	StB 8.5 (ø23) 0215700000	50
PS	PS 2.3 0180400000	20

Type	Cat. No.	Qty.
StB	StB 8.5 (ø23) 0215700000	50
PS	PS 2.3 0180400000	20

Type	Cat. No.	Qty.
StB	StB 8.5 (ø2.3) 0215700000	50
PS	PS 2.3 0180400000	20

Type	Cat. No.	Qty.
StB	StB 8.5 (ø2.3) 0215700000	50
PS	PS 2.3 0180400000	20

Type	Cat. No.	Qty.
FW/FS	dekafix 6 see "Accessories"	

Type	Cat. No.	Qty.
FW/FS	dekafix 6 see "Accessories"	

Type	Cat. No.	Qty.
FW/FS	dekafix 6 see "Accessories"	

Type	Cat. No.	Qty.
FW/FS	dekafix 6 see "Accessories"	

Type	Cat. No.	Qty.
FW/FS	dekafix 6 see "Accessories"	

Mounting rails, end brackets, further marking material see "Accessories"

* The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used.
** Only to be used with PA-version


¹⁾ Shock-proof with ADP4 cover profile (see section "Accessories")

Feed-through terminals and disconnect test terminals


with solder connection

SAK 2.5/M.LS


With screen lug



SAK 2.5 L SAK 2.5 L/35



SAK 2.5 LL SAK 2.5 LL/35



SAKR L SAKR L/35

Disconnect terminal



Dimensions/approvals

Width/length/height (mm)	with TS 32	
Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade		

Rated data

Rated voltage/current/cross-section	250 V/20 A/2.5/1.5 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	4 kV/3

Further technical data

Tightening torque range	Nm	0.4...0.7
Torque setting with electric screwdriver type DMS 2		1

Clampable conductor

Solid H07V-U	mm ²	0.5...6
Stranded H07V-R	mm ²	0.5...2.5
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²	0.5...2.5
Plug gauge according to 60 947-7-1	Size	A 3

Continuous current of terminal block for conductor size		
Continuous current rating of cross-connection 2-pole	A	(Q 2...10) 24
Continuous current rating of cross-connection multipole	A	

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/10 A/22...12 AWG
Voltage/current/conductor size	CSA	300 V/10 A/22...12 AWG

Ordering data

Type	Cat. No.	Qty.
KrG	0309120000	100
Blue KrG		
KrS		
PA		
Blue PA		
KrG		
PA		
Blue PA		

Type	Cat. No.	Qty.
KrG	0309120000	100
Blue KrG		
KrS		
PA		
Blue PA		
KrG		
PA		
Blue PA		

Type	Cat. No.	Qty.
KrG	0351420000	100
Blue KrG		
KrS		
PA		
Blue PA		
KrG		
PA		
Blue PA		

Type	Cat. No.	Qty.
KrG	0323620000	100
Blue KrG		
KrS		
PA		
Blue PA		
KrG		
PA		
Blue PA		

Type	Cat. No.	Qty.
KrG	0412360000	100
Blue KrG		
KrS		
PA		
Blue PA		
KrG		
PA		
Blue PA		

End plate/partition (thickness mm)

Type	Cat. No.	Qty.
AP (1.5)	0309220000	20
Blue AP (1.5)	0309270000	20
PA		
Blue PA		
PA	0302860000	20
HP	0297100000	20
HP	0607000000	20



Type	Cat. No.	Qty.
AP (1.5)	0309220000	20
Blue AP (1.5)	0309270000	20
PA		
Blue PA		
PA	0302860000	20
HP	0297100000	20
HP	0607000000	20

Type	Cat. No.	Qty.
AP (1.5)	0309220000	20
Blue AP (1.5)	0309270000	20
PA		
Blue PA		
PA	0302860000	20
HP	0297100000	20
HP	0607000000	20

Type	Cat. No.	Qty.
AP (1.5)	0309220000	20
Blue AP (1.5)	0309270000	20
PA		
Blue PA		
PA	0302860000	20
HP	0297100000	20
HP	0607020000	20

Type	Cat. No.	Qty.
AP (1.5)	0211360000 ¹⁾	20
Blue AP (1.5)	0211380000	20
PA		
Blue PA		
PA	0412460000 [*]	100
HP	0412480000 [*]	100

Small partition

TSch 1	0319160000	100
--------	-------------------	-----



TSch 1	0319160000	100
--------	-------------------	-----

TSch 1	0319160000	100
--------	-------------------	-----

Cross-connection

Type	Cat. No.	Qty.
Q 2	0337000000	50
Q 3	0337100000	50
Q 4	0337200000	50
Q 10	0368700000	20
25-pole		



Q 2	0337000000	50
Q 3	0337100000	50
Q 4	0337200000	50
Q 10	0368700000	20

Q 2	0337000000	50
Q 3	0337100000	50
Q 4	0337200000	50
Q 10	0368700000	20

Q 2	0337000000	50
Q 3	0337100000	50
Q 4	0337200000	50
Q 10	0368700000	20

QB 2**	0482700000	100
QB 3**	0482800000	50
QB 4**	0482900000	50
QB 25 blank**	0134000000	20

Test plug/socket

StB	Plug-test socket without using QL
PS	Plug-test-socket for use with QL



StB 8.5 (ø23)	0280600000	50
StB 29.5 (ø4)	0133400000	50
PS 2.3	0180400000	20
PS 4	0299600000	20

StB 8.5 (ø23)	0280600000	50
StB 29.5 (ø4)	0133400000	50
PS 2.3	0180400000	20
PS 4	0299600000	20

StB 8.5 (ø23)	0280600000	50
StB 29.5 (ø4)	0133400000	50
PS 2.3	0180400000	20
PS 4	0299600000	20

PS 2.3	0180400000	20
--------	-------------------	----

Cover

AD 4	0303400000	50
BSK M3x22	0128900000	100

AD 4	0303400000	50
BSK M3x22	0128900000	100

AD 4	0303400000	50
BSK M3x22	0128900000	100

Marking tags

DEK	Standard	DEK 6	see "Accessories"
-----	----------	-------	-------------------



DEK 6	see "Accessories"
-------	-------------------

DEK 6	see "Accessories"
-------	-------------------

DEK 6	see "Accessories"
-------	-------------------

DEK 6.5	see "Accessories"
---------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

* Soldering lug on left-hand side

** The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used.

¹⁾ For TS 32 and TS 35

²⁾ Contact-proof cross-connection with ADP 4 cover profile (see "Accessories")

Disconnect test terminals with solder connections


SAKR L

With 2 StB 6



SAKR LL

With 2 StB 6



SAKR LL

With 2 StB 6



Dimensions/approvals

Width/length/height (mm)	with TS 32	
Width/length/height (mm)	with TS 35 x 7.5	
Insulation stripping length/clamping screw/screwdriver blade		

Rated data

Rated voltage/current/cross-section	250 V/10 A/4/1.5 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	4 kV/3

Further technical data

Tightening torque range	Nm	0.5...1.0
Torque setting with electric screwdriver type DMS 2		1

Clampable conductor

Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	1.5...4
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46228/1		
With/without plastic insulating collar	mm ²	0.5...4
Plug gauge according to 60 947-7-1	Size	A 3

Continuous current of terminal block for conductor size		
Continuous current rating of cross-connection 2 pole	A	(QB 2...25) 10
Continuous current rating of cross-connection multipole	A	

Rated data according to UL/CSA

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

Ordering data

Type	Qty.	Qty.
KrG		
Blue KrG		
KrS		
PA	0518160000	100
Blue PA		
KrG		
KrS		
PA	0572660000	100
Blue PA		

6.5/50/40.5/54.5 (opened)

8 mm/M 3/3.5 x 0.6

250 V/10 A/4/1.5 mm²

4 kV/3

0.5...1.0

1

0.5...4

1.5...4

0.5...4

0.5...4

A 3

(QB 2...25) 10

A



6.5/58/40.5/54.5 (opened)

250 V/10 A/1.5 mm²

4 kV/3

300 V/10 A/22...12 AWG

300 V/10 A/22...12 AWG

Qty.

Qty.

Qty.

Qty.

300 V/10 A/22...12 AWG

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

6.5/58/40.5/54.5 (opened)

-/-/3.5 x 0.6

250 V/10 A/1.5 mm²

4 kV/3

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

Qty.

End plate/partition (thickness mm)

Type	Cat. No.	Qty.
AP		
TW		
KrG		
Blue KrG		
PA	AP (1.5)	0211360000 20
Blue PA	AP (1.5)	0211380000 20
PA		
HP	TW (0.5)	0474700000 20
HP	TW (2.0)	0607000000 20



Small partition



Cross-connection

Type	Cat. No.	Qty.
QB 3		
QB 4		
2-pole	QB 2**	0482700000 100
3-pole	QB 3**	0482800000 50
4-pole	QB 4**	0482900000 50
10-pole		
25-pole	QB 25 blank**	0134000000 20




Test plug/socket

Type	Cat. No.	Qty.
PS		
PS 2.3	0180400000	20



Marking tags

Type	Cat. No.	Print
DEK		Standard
DEK 6.5	see "Accessories"	



Mounting rails, end brackets, further marking material see "Accessories"

* Soldering lug on left-hand side

** The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used.

Disconnect test terminals with solder connections

TAL
2 solder connections

TAL
4 solder connections

SAKK 4 **SAKK 10**
Ceramic feed-through terminals for use in high temperature
ranges up to max. 210°C



Dimensions/approvals

Width/length/height (mm) with TS 32
 Width/length/height (mm) with TS 35 x 7.5
 Insulation stripping length/clamping screw/screwdriver blade

4/48/36/50 (opened)

4/54/36/50 (opened)

8/40/53

11.5/40/53

Rated data

Rated voltage/current/cross-section
 Rated impulse voltage VDE 0110/1.89/pollution severity

63 V/10 A/1.5 mm²
1.5 kV/3

63 V/10 A/1.5 mm²
1.5 kV/3

IEC 60 947-7-1
800 V/32 A/4 mm²

IEC 60 947-7-1
800 V/57 A/10 mm²

Further technical data

Tightening torque range Nm
 Torque setting with electric screwdriver type DMS 2

0.5...1

1.2...2

Clampable conductor

Solid H07V-U mm²
 Stranded H07V-R mm²
 Flexible H07V-K mm²
 Flexible H07V-K and ferrule according to DIN 46 228/1 mm²
 Plug gauge according to 60 947-7-1 Size

0.5...6 mm²

2.5...16 mm²

0.5...4 mm²

2.5...10 mm²

Continuous current of terminal block for conductor size
 Continuous current rating of cross-connection 2 pole A
 Continuous current rating of cross-connection multipole A

A 4

B 6

35 A/6 mm²

63 A/16 mm²

36

47

36

36

Rated data according to UL/CSA

Voltage/current/conductor size UL
 Voltage/current/conductor size CSA

Ordering data

Type Cat. No. Qty.
 KrG
 Blue KrG
 KrS
 PA **0212060000** 100
 Blue PA
 KrG
 KrS
 PA
 Blue PA
 Ceramic

Type Cat. No. Qty.
 KrG
 Blue KrG
 KrS
 PA **0304960000** 100
 Blue PA
 KrG
 KrS
 PA
 Blue PA
 Ceramic

Type Cat. No. Qty.
 SAKK 4 **1598080000** 50
 AP/SAKK 4/10 **9502630000** 10

Type Cat. No. Qty.
 SAKK 10 **1598090000** 50
 AP/SAKK 4/10 **9502630000** 10

End plate/partition (thickness mm)

AP TW
 KrG
 Blue KrG
 PA **0212260000** 20
 Blue PA
 PA

Type Cat. No. Qty.
 AP (1.5) **0212260000** 20

Type Cat. No. Qty.
 AP (1.5) **0212260000** 20

Type Cat. No. Qty.
 SAKK 4 **1598080000** 50
 AP/SAKK 4/10 **9502630000** 10

Type Cat. No. Qty.
 SAKK 10 **1598090000** 50
 AP/SAKK 4/10 **9502630000** 10

Small partition

Cross-connection

Q 3 QB 4
 2-pole
 3-pole
 4-pole
 10-pole
 25-pole

Type Cat. No. Qty.
 QL 2 **9509420000** 100
 QL 3 **9509430000** 100
 QL 4 **9509440000** 50
 QL 10 **9509450000** 20
 VH 13.5 **0248500000** 100
 BS (M3 X 20) **0303000000** 100

Type Cat. No. Qty.
 QL 2 **9509470000** 100
 QL 3 **9509480000** 50
 QL 4 **9509490000** 50
 QL 10 **9509500000** 20
 VH 12.5 **9509510000** 50
 BS (M3 X 20) **0303000000** 100

Additional accessories

SST **0152700000**
 MEW 1/32 **0445600000**
 EK 2 **0323100000**

SST **0152700000**
 MEW 1/32 **0445600000**
 EK 2 **0323100000**

Marking tags

DEK Standard On demand

On demand


On demand

Mounting rails, end brackets, further marking material see "Accessories"

SAK-series



Feed-through terminals for initiators and actuators

DLI 2.5




6/65/49
7 mm/M 2.5/3.5 x 0.6

DLI 2.5 LD PNP



6/65/49
7 mm/M 2.5/3.5 x 0.6

DLI 2.5 LD NPN



6/65/49
7 mm/M 2.5/3.5 x 0.6

DLD 2.5



6/82/49
7 mm/M 2.5/3.5 x 0.6

Dimensions/approvals

Width/length/height (mm) with TS 35 x 7.5

Insulation stripping length/clamping screw/screwdriver blade

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section 250 V/20 A/2.5 mm²

Rated impulse voltage/pollution severity 4 kV/3

Further technical data

Tightening torque range Nm 0.4...0.6

Torque setting with electric screwdriver type DMS 2 1

Clampable conductor

Solid H07V-U mm² 0.5...4

Stranded H07V-R mm² 0.5...2.5

Flexible H07V-K mm² 0.5...4

Flexible H07V-K and ferrule according to DIN 46228/1 mm² 0.5...2.5

Plug gauge according to 60 947-7-1 Size A 3

Continuous current of terminal for conductor size 20 A/2.5 mm²

Continuous current rating of cross-connection 2...5-pole A (Q 2...10) 20

Continuous current rating of cross-connection 6...10-pole A (Q 2...10) 20

Rated data according to UL/CSA

Voltage/current/conductor size UL 300 V/10 A/26...12 AWG

Voltage/current/conductor size CSA 300 V/10 A/26...12 AWG

Ordering data

Standard	Cat. No.	Qty.
Standard	1313360000	100
with diode 1N4007		
with LED red (5...30 V)	1578510000	100
with LED green (5...30 V)	1578520000	100
with LED and diode 1N4007		
with LED and diode 1N4007		
Block of 10 ¹⁾	(w/o) 1411360000	10
Block of 10 ¹⁾	(with dekafix) 1579070000	10
Fuse inserts		

End plate/Small partition

Type	Cat. No.	Qty.
AP-DLI	1313260000	20
AP-DLD		
Part-AP		
TSch 1	0319160000	100

(thickness 1.5 mm)

Test plug/plug socket

StB 8.5 (ø23)	0215700000	50
PS 2.3	0180400000	20

Cross-connection

Q 2	1312500000	50
Q 3	1312600000	50
Q 4	1312700000	50
Q 10	1313100000	20
Q 20	1399800000	20

VQB

Snap fit, external cross-connection VQB 1.5.

For cross-connections for more than 20 terminals, replace VH with VH 4.2 (134580) without internal thread

Group marking

WT 4	1341060000	100
SF 10	0332400000	1000
SG 10	0332500000	1000

Cover

ADP	0485400000	20
HP 4	0485860000	20

Marking tags


Print	DEK	Standard
1 2 3 4 5 6	DEK 6	see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

1) DLI 2.5/35/10 = Block of 10 with built-in cross-connections * only in upper busbar

Feed-through terminals for initiators and actuators

DLA 2.5



6/65/49
7 mm/M 2.5/3.5 x 0.6
250 V**/17.5 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm ²
(Q 2...20) 20

300 V/10 A/26...12 AWG
300 V/10 A/26...12 AWG
Cat. No. Qty.
1565970000 100
(w. dekafix) 1578380000 10
(w/o dekafix) 1578390000 10

Type	Cat. No.	Qty.
AP	1313260000	20
TSch 1	0319160000	100

StB8.5*(ø23) 0215700000	50
PS 2.3 0180400000	20


Q 2 1312500000	50
Q 3 1312600000	50
Q 4 1312700000	50
Q 10 1313100000	20
Q 20 1399800000	20

QL 2 0297200000	100
VH 4.2 1345800000	100
VQB1.5/50 BL 1633280000	5
VQB1.5/50 RT 1633290000	5
VQB1.5/50 SW 1635120000	5

WT 4 1341060000	100
SF 10 0332400000	1000
SG 10 0332500000	1000
ADP 0485400000	20
HP 4 0485860000	20

DEK 6	see "Accessories"
-------	-------------------

DLA 2.5/D



6/65/49
7 mm/M 2.5/3.5 x 0.6
250 V**/17.5 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm ²
(Q 2...20) 20

300 V/10 A/26...12 AWG
300 V/10 A/26...12 AWG
Cat. No. Qty.
1578400000 100

Type	Cat. No.	Qty.
AP	1313260000	20
TSch 1	0319160000	100

StB8.5*(ø23) 0215700000	50
PS 2.3 0180400000	20


Q 2 1312500000	50
Q 3 1312600000	50
Q 4 1312700000	50
Q 10 1313100000	20
Q 20 1399800000	20

QL 2 0297200000	100
VH 4.2 1345800000	100
VQB1.5/50 BL 1633280000	5
VQB1.5/50 RT 1633290000	5
VQB1.5/50 SW 1635120000	5

WT 4 1341060000	100
SF 10 0332400000	1000
SG 10 0332500000	1000
ADP 0485400000	20
HP 4 0485860000	20

DEK 6	see "Accessories"
-------	-------------------

DLA 2.5/LD



6/65/49
7 mm/M 2.5/3.5 x 0.6
5-30 V/17.5 A/2.5 mm ²
0.8 kV/3
0.4...0.6
1
0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm ²
(Q 2...20) 20

300 V/10 A/26...12 AWG
5-30 V/10 A/26...12 AWG
Cat. No. Qty.
1578430000 100
1578440000 100

Type	Cat. No.	Qty.
AP	1313260000	20
TSch 1	0319160000	100

StB8.5*(ø23) 0215700000	50
PS 2.3 0180400000	20


Q 2 1312500000	50
Q 3 1312600000	50
Q 4 1312700000	50
Q 10 1313100000	20
Q 20 1399800000	20

QL 2 0297200000	100
VH 4.2 1345800000	100
VQB1.5/50 BL 1633280000	5
VQB1.5/50 RT 1633290000	5
VQB1.5/50 SW 1635120000	5

WT 4 1341060000	100
SF 10 0332400000	1000
SG 10 0332500000	1000
ADP 0485400000	20
HP 4 0485860000	20

DEK 6	see "Accessories"
-------	-------------------

DLA 2.5/LD/D



6/65/49
7 mm/M 2.5/3.5 x 0.6
5-30 V/17.5 A/2.5 mm ²
0.8 kV/3
0.4...0.6
1
0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm ²
(Q 2...20) 20

300 V/10 A/26...12 AWG
5-30 V/10 A/26...12 AWG
Cat. No. Qty.
(LED red) 1578470000 100
(LED green) 1578480000 100
(LED red) 1578490000 10
(LED green) 1578500000 10

Type	Cat. No.	Qty.
AP	1313260000	20
TSch 1	0319160000	100

StB8.5*(ø23) 0215700000	50
PS 2.3 0180400000	20

Q 2 1312500000	50
Q 3 1312600000	50
Q 4 1312700000	50
Q 10 1313100000	20
Q 20 1399800000	20

QL 2 0297200000	100
VH 4.2 1345800000	100
VQB1.5/50 BL 1633280000	5
VQB1.5/50 RT 1633290000	5
VQB1.5/50 SW 1635120000	5

WT 4 1341060000	100
SF 10 0332400000	1000
SG 10 0332500000	1000
ADP 0485400000	20
HP 4 0485860000	20

DEK 6	see "Accessories"
-------	-------------------

DLD 2.5/PE



6/74.5/49
7 mm/M 2.5/3.5 x 0.6
250 V**/17.5 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...4
0.5...2.5
0.5...4
0.5...2.5
A 3
20 A/2.5 mm ²
(Q 2...20) 20

300 V/10 A/26...12 AWG
300 V/10 A/26...12 AWG
Cat. No. Qty.
1595950000 100

Type	Cat. No.	Qty.
AP	1595960000	20
AP (Part-AP)	1595970000	
TSch 1	0319160000	100

StB8.5*(ø23) 0215700000	50
PS 2.3 0180400000	20



Q 2 1312500000	50
Q 3 1312600000	50
Q 4 1312700000	50
Q 10 1313100000	20
Q 20 1399800000	20

QL 2 0297200000	100
VH 4.2 1345800000	100
VQB1.5/50 BL 1633280000	5
VQB1.5/50 RT 1633290000	5
VQB1.5/50 SW 1635120000	5

WT 4 1341060000	100
SF 10 0332400000	1000
SG 10 0332500000	1000
ADP 0485400000	20
HP 4 0485860000	20

DEK 6	see "Accessories"
-------	-------------------

KDKS1/PE



8/91/65
8 mm/M 3 ² /M 2.5 ³ /3.5 x 0.6
500 V/6.3 A/4 mm ²
6 kV/3
0.5...1 ² /0.4...0.7 ³
2/1***
0.5...4
0.5...4
0.5...4
A 4 ² / A 3 ³

-/22...12 AWG
Cat. No. Qty.
9528110000 50
not combine with DLI / DLA
Wemid 9532450000 50

Type	Cat. No.	Qty.
AP	9503330000	50
AP Wemid	9532470000	50

StB8.5*(ø23) 0215700000	50
PS 2.3 0180400000	20


Q 2 0461100000	50
Q 3 0461200000	50
Q 4 0461300000	50

5 x 20 without core indicator

** If the cross-connection runs via the PE connection of the DLA, or if a pole is generally skipped, the rated voltage is reduced to 30 V-
²) A4 clamping position = max 4 mm² ... ³) A3 clamping position = max 2.5 mm² ... ferrule with/without plastic insulating collar


Feed-through terminals for initiators and motors

VLI 1.5



UL	6/79/64
Insulation stripping length/clamping screw/screwdriver blade	8 mm/M 2.5/3.5 x 0.6

VLI 1.5PE



UL	6/69/63
Insulation stripping length/clamping screw/screwdriver blade	8 mm/M 2.5/3.5 x 0.6

MAK 2.5



UL	6/88/64
Insulation stripping length/clamping screw/screwdriver blade	8 mm/M 2.5/3.5 x 0.6

Dimensions/approvals

Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	8 mm/M 2.5/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	250 V/17.5 A/1.5 mm ²	250 V/17.5 A/1.5 mm ²	500 V (L-L)/250 V (L-PE) 24 A/2.5 mm ²
Rated impulse voltage/pollution severity	4 kV/3	4 kV/3	6 kV/3

Further technical data

Tightening torque range	Nm	0.4...0.6**	0.4...0.6	0.4...0.6
Torque setting with electric screwdriver type DMS 2		1	1	1

Clampable conductor

Solid H07V-U	mm ²	0.5...4.0	0.5...4.0	0.5...4.0
Stranded H07V-R	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Flexible H07V-K	mm ²	0.5...4	0.5...4	1.5...4
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...2.5	0.5...2.5	0.5...2.5
Plug gauge according to 60 947-7-1	Size	A3	A3	A3
Continuous current of terminal for conductor size		24 A/2.5 mm ²	24 A/2.5 mm ²	24 A/4 mm ²
Continuous current rating of cross-connection, multipole	A	24	24	24

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG
Voltage/current/conductor size	CSA	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG	300 V/10 A/26...12 AWG

Ordering data

Version	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
PA	1633250000	50	1633310000	50	1615270000	50
					1631650000	50

End plate/partition

Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
End plate	AP VLI1.5	1633260000	20	APVLI1.5/PE	1633320000	20	AP MAK2.5	1615280000	20
Partial end plate for VLI1.5 – MAK2.5 combination	TEAP2 MAK2.5	1633330000	20	TEAP VLI1.5	1633270000	20	TEAP2 MAK2.5	1633330000	20
Partial end plate for VLI1.5 – VLI1.5PE combination	TEAP VLI1.5	1633270000	20	TEAP1 MAK2.5	1633340000	20	TEAP1 MAK2.5	1633340000	20
Partial end plate for VLI1.5PE – MAK2.5 combination									

Cross-connection

VQB 50-pole, snap-fit, external cross-connection	VQB1.5/50BL* 1633280000	5	VQB1.5/50BL* 1633280000	5	VQB1.5/50BL* 1633280000	5
	VQB1.5/50RT* 1633290000	5	VQB1.5/50RT* 1633290000	5	VQB1.5/50RT* 1633290000	5
	VQB1.5/50SW* 1635120000	5	VQB1.5/50SW* 1635120000	5	VQB1.5/50SW* 1635120000	5
					QB 25 SW* 0520000000	20
					QB 25 RT* 0520060000	20
					QB 25 BL* 0520080000	20




QB 25-pole external cross-connection

Group marking

Tag carrier	T 5	0348500000	100	T 5	0348500000	100	T 5	0348500000	100
for S 10 tags	SF 10	0332400000	1000	SF 10	0332400000	1000	SF 10	0332400000	1000
	SG 10	0332500000	1000	SG 10	0332500000	1000	SG 10	0332500000	1000

Marking tags

Print	DEK	Standard	DEK 5	see "Accessories"	DEK 5	see "Accessories"	DEK 5	see "Accessories"
-------	-----	----------	-------	-------------------	-------	-------------------	-------	-------------------



Mounting rails, end brackets, further marking material see "Accessories"

* When using cross-connection bridges, the connected cross-section is reduced by one level
 ** 0.4...0.45 for lower connection level

Disconnect test terminal against induced high voltage

PPT/35



SAKH 6



Measures to minimize risks of electric voltage peaks in control systems of power plants and transforming stations:

- Insulation between installation and control cable by pulling disconnect plugs.
- Grounding of control cable is possible on an appropriate location of the workplace.
- Easy connection of electric isolation of counting, control and communication circuits.

Electricity Supply Industry Standard ESI 12-4 1973

The Electricity Supply Industry Standard ESI 12-4 1973 defines a detailed specification of control and protection equipment. The main functions of these installations are as follows:

- Insulation of the control cables located in front of ground or installation lines with increased potential, which is required to prevent unintentional contact of service staff with live parts.
- Separation of control cables from local control circuits.
- Application also includes test connections for auxiliary control circuits and / or local control circuits.
- Grounding of control cables and / or auxiliary control circuits.
- Bundled disconnection of all auxiliary control circuits from potential earth.
- A test voltage can be applied using the screening connection of the control cable, which is normally routed on the enclosure, with the help of an appropriate separation. This permits to check whether the screening line is correctly functioning. For this test, an insulated feed-through plate is required.

ESI 12-4:

"Terminating Equipment for Pilot Cables subject to Induced Transient Voltages exceeding 650 V rms".

Dimensions/approvals		PPT/35		SAKH 6		
Width/length/height (mm)	with TS 35 x 7.5	15/138/79				
Insulation stripping length/clamping screw/screwdriver blade		12 mm			12 mm	
Rated data according to IEC 60 947-7-1						
Rated voltage/current		15 kV ac (ESI 12-4)**/30 A		1 kV ac / 1.5 kV dc / 47 A		
Rated impulse voltage/pollution severity				>15 kV (from terminal to terminal)		
Clampable conductor						
Solid H07V-U	mm ²	0.5...10		0.5... 6		
Stranded H07V-R	mm ²	0.5...10*		0.5... 6		
Ordering data		Version	Cat. No.	Qty.	Cat. No.	Qty.
		EP	PPT/35 3835020000	10	SAKH 6 0126600000	50
End plate		EP	AP/PPT (3) 3835120000	10	AP 0131700000	20
Disconnect plug			TST/PPT 3835360000	10		
Displacement tool		PA	PH/PPT 3835260000	10		
			The disconnect plug may only be removed with the displacement tool.			
Test plug/socket			PS (4) 0299600000	20		
			StB 17 0147100000	50		
Insulated mounting rail		PVC 35 x 1.5 mm	TSK 35 0514300000	1		
Marking tags		Print				
	DEK	Standard	DEK 5 see "Accessories"		DEK 5 see "Accessories"	
Mounting rails, end brackets, further marking material see "Accessories"						

SAK-series

* Also two push-on tabs are possible
** mounted on an insulated mounting rail

Rail mounting TS 15

Feed-through terminals
Protective conductor terminals
Fuse terminals
Disconnect test terminals

AKZ 1.5
AKZ 1.5/10



AKZ 2.5



AKZ 4
AKZ 4/10
AKZ 4 Wemid



AKZ 4 for test adapter
AKZ 4/10 for test adapter



Max. technical data

Dimensions/approvals	
Width/length/height (mm)	with TS 15

Insulation stripping length/clamping screw/screwdriver blade	7 mm/M 2.5/3.0 x 0.5
Rated data VDE 0611 Part 1/8.92/IEC 60 947-7-1	
Rated voltage/current/cross-section	250 V/17.5 A/1.5 mm ²
Rated impulse voltage / pollution severity	4 kV/3
Further technical data	
Tightening torque range	Nm 0.4...0.6
Torque setting with electric screwdriver type DMS 2	1
Clampable conductor	
Solid H07V-U	mm ² 0.5...2.5
Stranded H07V-R	mm ² 1.5
Flexible H07V-K	mm ² 0.5...1.5
Flexible H07V-K and ferrule DIN 46 228/1	mm ² 0.5...1.5
Flexible H07V-K and ferrule with plastic insul. collar	mm ² 0.5...1.5
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size	0.2...2.5 / A 1

Continuous current rating of cross-connection 2-pole	A 24
Continuous current rating of cross-connection multipole	A 24

Rated data according to UL/CSA	
Voltage/current/conductor size	UL 150 V/15 A/22...14 AWG
Voltage/current/conductor size	CSA 300 V/10 A/24...16 AWG

Ordering data	Type	TS 15	Cat. No.	Qty.
	KrG			
	PA		0340460000	100
	Blue PA		0340480000	100
	PA	(10pol./no.mk.)	0358060000	10
	PA	(10pol./w.mk.)	0358160000	10

21.5 A / 2.5 mm ²	
5/25/25	

7 mm/M 2.5/3.0 x 0.5	
250 V/17.5 A/1.5 mm ²	
4 kV/3	
Nm 0.4...0.6	
1	
mm ² 0.5...2.5	
mm ² 1.5	
mm ² 0.5...1.5	
mm ² 0.5...1.5	
mm ² 0.5...1.5	
0.2...2.5 / A 1	

A 24	
A 24	

UL 150 V/15 A/22...14 AWG	
CSA 300 V/10 A/24...16 AWG	

Type	TS 15	Cat. No.	Qty.
(with pin)		0697160000	100
(with pin)		0697180000	100
(without pin)		0175960000	100
AKZ 2.5 w. AP		0385860000	50

26 A / 4 mm ²	
5/25.5/28	

7 mm/M 2.5/3.0 x 0.5	
250 V/24 A/2.5 mm ²	
4 kV/3	
Nm 0.4...0.6	
1	
mm ² 0.5...4	
mm ² 1.5...2.5	
mm ² 0.5...4	
mm ² 0.5...2.5	
mm ² 0.5...2.5	
0.13...4.0 / A 3	

A 24	
A 24	

UL 300 V/10 A/26...12 AWG	
CSA 300 V/10 A/26...12 AWG	

Type	TS 15	Cat. No.	Qty.
		0294320000	100
		0294360000	100
		0294380000	100
(10pol./no.mk.)		0359560000	10
(10pol./w.mk.)		0359660000	10
AKZ 4 Wemid		9537110000	100

38.5 A / 6 mm ²	
6/27/30	

8 mm/M 3/3.5 x 0.6	
400 V/32 A/4 mm ²	
6 kV/3	
0.5...1.0	
2	
mm ² 0.5...6	
mm ² 1.5...4	
mm ² 0.5...4	
mm ² 0.5...4	
mm ² 0.5...4	
0.2...6.0 / A 3	

A 32	
A 32	

UL 300 V/27 A/22...12 AWG	
CSA 300 V/10 A/24...12 AWG	

Type	TS 15	Cat. No.	Qty.
		0294320000	100
		0294360000	100
		0294380000	100
(10pol./no.mk.)		0359560000	10
(10pol./w.mk.)		0359660000	10
AKZ 4 Wemid		9537110000	100

38.5 A / 6 mm ²	
60/27/30	

9 mm/M 3/3.5 x 0.6	
500 V/32 A/4 mm ²	
6 kV/3	
0.5...1.0	
2	
mm ² 0.5...6	
mm ² 1.5...4	
mm ² 0.5...4	
mm ² 0.5...4	
mm ² 0.5...4	
0.2...6.0 / A 3	

A 32	
A 32	

UL 300V/27 A/22...12 AWG	
CSA 300 V/10 A/24...12 AWG	

Type	TS 15	Cat. No.	Qty.
		1538260000	100
		1489360000	10
ATA1,10-pole		1633240000	5


End plate (thickness mm)	Type	Cat. No.	Qty.
---------------------------------	------	----------	------



Partition (thickness mm)	Type	Cat. No.	Qty.
---------------------------------	------	----------	------



Small partition	Type	Cat. No.	Qty.
------------------------	------	----------	------



Cross-connection	Type	Cat. No.	Qty.
-------------------------	------	----------	------



Switchable cross-connection link	Type	Cat. No.	Qty.
---	------	----------	------




Cover/Profiled material for covers for finger-safety*	Type	Cat. No.	Qty.
--	------	----------	------



Test plug/socket	Type	Cat. No.	Qty.
-------------------------	------	----------	------



Marking tags	Type	Cat. No.	Qty.
---------------------	------	----------	------



Mounting rails, end brackets, further marking material see "Accessories"	Type	Cat. No.	Qty.
---	------	----------	------

* not for terminals made from PA

Type	Cat. No.	Qty.
------	----------	------

AP (1.5)	0340560000	50
----------	-------------------	----

Type	Cat. No.	Qty.
------	----------	------

TW (1.5)	0318560000	20
TW (1.5)	0318580000	20

Type	Cat. No.	Qty.
------	----------	------

TSch 4	0363360000	100
--------	-------------------	-----

Q 2	0368200000	50
-----	-------------------	----

Q 3	0368300000	50
-----	-------------------	----

Q 4	0368400000	50
-----	-------------------	----

Q 5	0660300000	20
-----	-------------------	----

Q 10	0368500000	20
------	-------------------	----

Type	Cat. No.	Qty.
------	----------	------

AP (2.5)	0697360000	50
AP (2.5)	0697380000	50

Type	Cat. No.	Qty.
------	----------	------

TW (1.5)	0318560000	20
TW (1.5)	0318580000	20

Type	Cat. No.	Qty.
------	----------	------

TSch 4	0363360000	100
--------	-------------------	-----

Q 2	0368200000	50
-----	-------------------	----

Q 3	0368300000	50
-----	-------------------	----

Q 4	0368400000	50
-----	-------------------	----

Q 5	0660300000	20
-----	-------------------	----

Q 10	0368500000	20
------	-------------------	----

Type	Cat. No.	Qty.
------	----------	------

AP (1.5)	0294420000	20
AP (1.5)	9537910000	20
AP (1.5)	0294460000	20
AP (1.5)	0294480000	20

Type	Cat. No.	Qty.
------	----------	------

TW (2.0)	0118900000	20
TW (0.5)	0348260000	50

Type	Cat. No.	Qty.
------	----------	------

TSch 4	0363360000	100
--------	-------------------	-----

Q 2	0336400000	50
-----	-------------------	----

Q 3	0336500000	50
-----	-------------------	----

Q 4	0336600000	50
-----	-------------------	----

Q 10	0368600000	20
------	-------------------	----

Q 2	0336400000	50
-----	-------------------	----

Q 3	0336500000	50
-----	-------------------	----

Q 4	0336600000	50
-----	-------------------	----

Q 10	0368600000	20
------	-------------------	----

VL 2	0446700000	50
------	-------------------	----

VH 10	0446600000	50
-------	-------------------	----

BS M 2.5x14	0266800000	100
-------------	-------------------	-----

AD 4	0303400000	50
------	-------------------	----

BSKM 25x18	0303300000	100
------------	-------------------	-----

ADP 4 ¹⁾	1378160000	10
---------------------	-------------------	----

StB 8.5	0215700000	50
---------	-------------------	----

PS 2.3	0180400000	20
--------	-------------------	----

DEK 6	see "Accessories"	
-------	-------------------	--

DEK 6	see "Accessories"	
-------	-------------------	--

DEK 6	see "Accessories"	
-------	-------------------	--

DEK 6	see "Accessories"	
-------	-------------------	--

¹⁾ Length: 300 mm

Rail mounting TS 15

AK 4 AK 4/10



38.5 A / 6 mm²

UL **CE**
60/32/34

9 mm/M 3/3.5 x 0.6

690 V/32 A/4 mm²
8 kV/3

0.5...1.0
2

0.5...6
1.5...4

0.5...4
0.5...4

0.5...4
0.2...6.0 / A 3

20
20

TS 15 Cat. No. Qty.

0489560000 100

(10pol./no.mk.) **0366560000** 10
(10pol./w.mk.) **0469560000** 10

Type Cat. No. Qty.

BB 3 (8.0) **0366660000** 50
combined AP + end brackets

TW/AP (1.5) **1331760000** 20

TSch 4 **0363360000** 100

Q 2 **0369000000** 50

Q 3 **0369100000** 50

Q 4 **0369200000** 50

Q 10 **0369300000** 20

AD 4 **0303400000** 50

BSKM 25x18 **0303300000** 100

StB 8.5 **0215700000** 50

PS 2.3 **0180400000** 20

DEK 6 see "Accessories"

AKE 2.5



UL **CE**

5/28/27

7 mm/M 2.5/3.0 x 0.5

IEC 60 947-7-2

-/-/2.5 mm²
4 kV/3

0.4...0.6
1

0.5...4
1.5...2.5

0.5...4
0.5...2.5

0.5...2.5
0.13...4.0 / A 3

TS 15 Cat. No. Qty.

1303360000 100

(green/yellow)

Type Cat. No. Qty.

-/-/26...12 AWG
-/-/26...12 AWG

AKE 4



UL **CE**

7/32/34

9 mm/M 3/3.5 x 0.6

IEC 60 947-7-2

-/-/4 mm²
8 kV/3

0.5...1.0
2

0.5...6
1.5...4

0.5...4
0.5...2.5

0.5...2.5
0.13...4.0 / A 3

TS 15 Cat. No. Qty.

0380260000 100

(green/yellow)

Type Cat. No. Qty.

-/-/22...12 AWG
-/-/26...12 AWG

AKE 4 MS



CE

7/27.5/30

9 mm/M 3/3.5 x 0.6

-/-/4 mm²

0.8...1.6
3

0.5...4
1.5...4

0.5...4
0.5...4

0.5...4
0.5...4.0 / A 3

TS 15 Cat. No. Qty.

0211200000 50

-/-/22...14 AWG

Type Cat. No. Qty.

ASK 1

Fuse terminal



UL **CE**

8/58/34

9 mm/M 3/3.5 x 0.6

500 V/6.3 A¹/4 mm²
6 kV/3

0.5...1.0
2

0.5...4
1.5...4

0.5...4
0.5...2.5

0.5...2.5
0.13...4.0 / A 3

(QB 2...4) 10

300 V/10 A/22...12 AWG

300 V/6.3 A/26...12 AWG

TS 15 Cat. No. Qty.

0376860000 100

5 x 20 without indicator

Type Cat. No. Qty.

AP (1.5) **0380360000** 20

QB 2¹⁾ insul. **0461100000** 50

QB 3¹⁾ insul. **0461200000** 50

QB 4¹⁾ insul. **0461300000** 50

3-pole ganging with tag bar
SchS 2, snapped onto three
disconnect levers
(Cat. No. **0337400000**)

K sleeve **0553300000** 100

DEK 6.5 see "Accessories"

SAKR

Isolating blade terminal with 2 sockets or with 2 clamping screws



6.5/42/45

8 mm/M 3/3.5 x 0.6

400 V²⁾/10 A/4 mm²
6 kV/3

0.5...1.0
2

0.5...4
1.5...4

0.5...4
0.5...4

0.5...4
0.13...4.0 / A 3

(QB 2...4) 10

TS 15 Cat. No. Qty.

with 2 StB **0412860000** 100

w. clamp.screw **0412760000** 100

Type Cat. No. Qty.

AP (1.5) **0211360000** 20

QB 2¹⁾ insul. **0482700000** 50

QB 3¹⁾ insul. **0482800000** 50

QB 4¹⁾ insul. **0482900000** 50

QB 25¹⁾ blank **0134000000** 20

PS 2.3 **0180400000** 20

DEK 6.5 see "Accessories"

¹⁾ The conductor cross-section is * With contact sleeve 19 A reduced to max. 2.5 mm² when QB is used.

²⁾ As disconnect test terminal: rated voltage 250 V

Feed-through terminals for TS 15

Tab connection
Solder connection

AKZ 4 SS

AKZ 4 SS

AKZ 4 S

AKZ 4 SF



Dimensions/approvals	AKZ 4 SS	AKZ 4 SS	AKZ 4 S	AKZ 4 SF
Width/length/height (mm)	with TS 15 6/28.5/30.5	6/28.5/30.5	6/27/30	6/27/30
Insulation stripping length/clamping screw/screwdriver blade			9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6
Rated data				
Rated voltage*/current/cross-section	400 V/8 A/2.5/1 mm ²	400 V/8 A/1 mm ²	400 V/8 A/4/1 mm ²	400 V/8 A/4/1 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	6 kV/3	6 kV/3	6 kV/3	6 kV/3
Further technical data				
Tightening torque range	Nm		0.5...1.0	0.5...1.0
Torque setting with electric screwdriver type DMS 2			2	2
Clampable conductor				
Solid H07V-U	mm ²		0.5...4	0.5...4
Stranded H07V-R	mm ²		1.5...4	1.5...4
Flexible H07V-K	mm ²	Tab connec. 6.3 and 2.8 mm	0.5...4	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1	mm ²		0.5...4	0.5...4
Flexible H07V-K and ferrule with plastic insul. collar	mm ²		0.5...4	0.5...4
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size			0.2...4/A 3	0.2...4/A 3
Continuous current rating of cross-connection 2-pole	A	20	20	20
Continuous current rating of cross-connection multipole	A	20	20	20
Rated data according to UL/CSA				
Voltage/current/conductor size	UL	150 V/10 A/22...12 AWG	150 V/20 A/22...12 AWG	
Voltage/current/conductor size	CSA	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG
Ordering data	Type	Type	Type	Type
	TS 15	TS 15	TS 15	TS 15
	Cat. No.	Cat. No.	Cat. No.	Cat. No.
	Qty.	Qty.	Qty.	Qty.
	KrG			
	PA	0324560000	0324460000	0158760000
	Blue PA			
	PA			
End plate (thickness mm)	Type	Cat. No.	Qty.	Type
	PA	AP (1.5)	0294460000	20
	PA			
	Blue PA			
	HP			
	HP			
	BB			
Partition (thickness mm)	Type	Cat. No.	Qty.	Type
	PA	TW (0.5)	0348260000	50
	HP			
	HP			
Small partition				
Cross-connection				
	Q 2	0369000000	50	Q 2
	Q 3	0369100000	50	Q 3
	Q 4	0369200000	50	Q 4
	Q 10	0369300000	20	Q 10
Switchable cross-connection link				
	VL 2	0446700000	50	VL 2
	VH 10	0446600000	50	VH 10
	BSM 2.5x14	0266800000	100	BSM 2.5x14
Test plug/socket				
	StB	Plug test socket ø 2.3	StB 8.5	0215700000
	PS		PS 2.3	0180400000
Cover				
Insulation sleeves				
	IH 2.8	0386060000	100	IH 2.8
	IH 6.3	0386260000	100	IH 6.3
Marking tags				
	Print			
	DEK	Standard	DEK 6	see "Accessories"
			DEK 6	see "Accessories"
			DEK 6	see "Accessories"
			DEK 6	see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"				

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

Feed-through terminals for TS 15

AL 1



6.5/32/21
400 V/16 A/1 mm ²
6 kV/3
0.5...1
0.5...1
24
24
150 V/10 A/24...16 AWG
TS 15 Cat. No. Qty. 0137320000 100
Type Cat. No. Qty.
AP (1.5) 0294420000 20
AP (1.5) 0294460000 20
AP (1.5) 0294480000 20
EP (1.0) 0164100000 100
EP (1.0) 0164500000 100
TW (0.5) 0166800000 50
TSch 4 0363360000 100
Q 2 0368200000 50
Q 3 0368300000 50
Q 4 0368400000 50
Q 10 0368500000 20
VL 2 0446700000 50
VH 10 0446600000 50
BSM 2.5 x 14 0266800000 100
StB 8.5 0215700000 50
PS 2.3 0180400000 20
AD 4 0303400000 50
BSKM 25x18 0303300000 100
DEK 6.5 see "Accessories"

AKZ 1.5 L



5/34.5/25
7 mm / M 2.5 / 3.0 x 0.5
250 V/16 A/1.5 mm ²
4 kV/3
0.4...0.7
1
0.5...2.5
1.5
0.5...1.5
0.5...1.5
0.5...1.5
0.2...2.5 / A 1
24
24
150 V/10 A/24...16 AWG
TS 15 Cat. No. Qty. 0340160000 100
Type Cat. No. Qty.
AP (1.5) 0294420000 20
AP (1.5) 0294460000 20
AP (1.5) 0294480000 20
EP (1.0) 0164100000 100
EP (1.0) 0164500000 100
TW (0.5) 0166800000 50
TSch 4 0363360000 100
Q 2 0368200000 50
Q 3 0368300000 50
Q 4 0368400000 50
Q 10 0368500000 20
VL 2 0446700000 50
VH 10 0446600000 50
BSM 2.5 x 14 0266800000 100
StB 8.5 0215700000 50
PS 2.3 0180400000 20
AD 4 0303400000 50
BSKM 25x18 0303300000 100
DEK 5 see "Accessories"

AKZ 4 L



6/35.5/30
9 mm / M 3 / 3.5 x 0.6
250 V/16 A/4/1.5 mm ²
4 kV/3
0.5...1.0
2
0.5...4
1.5...4
0.5...4
0.5...4
0.5...4
0.2...4.0 / A 3
20
20
300 V/20 A/22...12 AWG
300 V/10 A/24...12 AWG
TS 15 Cat. No. Qty. 0334820000 100
0334860000 100
Type Cat. No. Qty.
AP (1.5) 0294420000 20
AP (1.5) 0294460000 20
AP (1.5) 0294480000 20
TW (0.5) 0348260000 50
TSch 4 0363360000 100
Q 2 0336400000 50
Q 3 0336500000 50
Q 4 0336600000 50
Q 10 0368600000 20
VL 2 0446700000 50
VH 10 0446600000 50
BSM 2.5 x 14 0266800000 100
StB 8.5 0215700000 50
PS 2.3 0180400000 20
AD 4 0303400000 50
BSKM 25x18 0303300000 100
DEK 6 see "Accessories"

AKZ 4 LL



6/44/30
250 V/16 A/1.5 mm ²
4 kV/3
0.5...1.5
1.5
0.5...1.5
0.5...1.5
0.2...2.5 / -
20
20
300 V/20 A/22...12 AWG
300 V/10 A/24...12 AWG
TS 15 Cat. No. Qty. 0346460000 100
Type Cat. No. Qty.
AP (1.5) 0294460000 20
TW (0.5) 0348260000 50
TSch 4 0363360000 100
Q 2 0336400000 50
Q 3 0336500000 50
Q 4 0336600000 50
Q 10 0368600000 20
VL 2 0446700000 50
VH 10 0446600000 50
BSM 2.5 x 14 0266800000 100
StB 8.5 0215700000 50
PS 2.3 0180400000 20
AD 4 0303400000 50
BSKM 25x18 0303300000 100
DEK 6 see "Accessories"


Feed-through terminals for TS 15

Solder connection
Spring-clip connection
 acc. to DIN 41611 Part 4
Wrap connection
 acc. to DIN/IEC 352 Part 1

AKZ 1.5 T



AKZ 1.5 T



* 035786 = 45 mm

AKZ 1.5 T



AKZ 2.5 K



Dimensions/approvals	with TS 15	AKZ 1.5 T	AKZ 1.5 T	AKZ 1.5 T	AKZ 2.5 K								
Width/length/height (mm)		5/25/45	5/25/39.5	5/28/44	5/26/46.7								
Pin size		0.8 x 1.6	1 x 1	0.8 x 1.6	0.8 x 1.6								
Insulation stripping length/clamping screw/screwdriver blade		7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5								
Rated data													
Rated voltage/current/cross-section		125 V/8 A/1.5 mm ²	125 V/8 A/1.5 mm ²	125 V/8 A/1.5 mm ²	125 V/10 A/2.5 mm ²								
Rated impulse voltage VDE 0110/1.89/pollution severity		2.5 kV/3	2.5 kV/3	2.5 kV/3	2.5 kV/3								
Further technical data													
Tightening torque range	Nm	0.4...0.7	0.4...0.7	0.4...0.7	0.4...0.6								
Torque setting with electric screwdriver type DMS 2		1	1	1	1								
Clampable conductor													
Solid H07V-U	mm ²	0.5...2.5	0.5...2.5	0.5...2.5	0.5...4								
Stranded H07V-R	mm ²	1.5	1.5	1.5	1.5...2.5								
Flexible H07V-K	mm ²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5								
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5								
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5								
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1	Size	0.13...2.5 / A1	0.13...2.5 / A1	0.13...2.5 / A1	0.13...4.0 / A3								
Continuous current rating of cross-connection 2-pole	A	24	24	24	24								
Continuous current rating of cross-connection multipole	A	24	24	24	24								
Rated data according to UL/CSA													
Voltage/current/conductor size	UL	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG								
Voltage/current/conductor size	CSA	300 V/10 A/24...16 AWG	300 V/10 A/24...16 AWG	300 V/10 A/24...16 AWG	300 V/10 A/26...10 AWG								
Ordering data	Pin versions	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0.6 x 0.6	AKZ 1.5 T	0442560000	100	AKZ 1.5 T	0483660000	100	AKZ 1.5 T	0400460000	100	AKZ 2.5 K	0696260000	100
	1.0 x 1.0	AKZ 1.5 T	0357960000	100	AKZ 1.5 T	0357860000	100	AKZ 1.5 T	0400360000	100			
	0.8 x 1.6 horizont.	AKZ 1.5 W	0329460000	100									
	0.8 x 1.6 vertical												
	0.8 x 2.4 horizontal												
	0.8 x 2.4 vertical												
Mounting, horizontal	Mounting, vertical												
End plate (thickness mm)	PA	AP (1.5)	0340560000	50	AP (1.5)	0340560000	50	AP (1.5)	0340560000	50	AP (2.5)	0697260000	50
Partition (thickness mm)	PA										TW (1.5)	0318560000	20
Small partition													
Cross-connection													
	2-pole	Q 2	0368200000	50	Q 2	0368200000	50	Q 2	0368200000	50	Q 2	0368200000	50
	3-pole	Q 3	0368300000	50	Q 3	0368300000	50	Q 3	0368300000	50	Q 3	0368300000	50
	4-pole	Q 4	0368400000	50	Q 4	0368400000	50	Q 4	0368400000	50	Q 4	0368400000	50
	10-pole	Q 10	0368500000	20	Q 10	0368500000	20	Q 10	0368500000	20	Q 10	0368500000	20
Switchable cross-connection link													
	VL												
	BS												
	VH												
Test plug/socket													
	StB	Plug test socket ø 2.3	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000
	PS		PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000
Marking tags	Print												
	DEK	Standard	DEK 5	see "Accessories"	DEK 5	see "Accessories"	DEK 5	see "Accessories"	DEK 5	see "Accessories"	DEK 5	see "Accessories"	DEK 5
Mounting rails, end brackets, further marking material see "Accessories"													

Feed-through terminals for TS 15

AKZ 2.5 K



AKZ 2.5 K



AKZ 4 T



AKZ 4 T



AKZ 4 T



AKZ 4 ST




AKZ 2.5 K			AKZ 2.5 K			AKZ 4 T			AKZ 4 T			AKZ 4 T			AKZ 4 ST		
5/26/46.7			5/47.5/27			6/27/48.5			6/27/50.5			6/27/57.8			6/27/50.2		
0.8 x 1.6			0.8 x 1.6			1 x 1			0.8 x 1.6			0.8 x 2.4			0.8 x 1.6		
7 mm/M 2.5/3.0 x 0.5			7 mm/M 2.5/3.0 x 0.5			9 mm/M 3/3.5 x 0.6			9 mm/M 3/3.5 x 0.6			9 mm/M 3/3.5 x 0.6			-		
250 V/8 A/2.5 mm ²			250 V/8 A/2.5 mm ²			250 V/10 A/4 mm ²			250 V/10 A/4 mm ²			250 V/10 A/4 mm ²			250 V/10 A/2.5 mm ²		
4 kV/3			4 kV/3			4 kV/3			4 kV/3			4 kV/3			4 kV/3		
0.4...0.6			0.4...0.6			0.5...1.0			0.5...1.0			0.5...1.0					
1			1			2			2			2					
0.5...4			0.5...4			0.5...4			0.5...4			0.5...4					
1.5...2.5			1.5...2.5			1.5...4			1.5...4			1.5...4					
0.5...2.5			0.5...2.5			0.5...4			0.5...4			0.5...4					
0.5...2.5			0.5...2.5			0.5...4			0.5...4			0.5...4					
0.5...2.5			0.5...2.5			0.5...4			0.5...4			0.5...4					
0.13...4.0 / A3			0.13...4.0 / A3			0.13...4.0 / A3			0.13...4.0 / A3			0.13...4.0 / A3			0.5...2.5 / -		
24			24			20			20			20			20		
24			24			20			20			20			20		
300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG			300 V/10 A/26...14 AWG		
300 V/10 A/26...10 AWG			300 V/10 A/26...10 AWG			300 V/10 A/24...12 AWG			300 V/10 A/24...12 AWG			300 V/10 A/24...12 AWG			300 V/10 A/24...12 AWG		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
AKZ 2.5 K	0695460000	100	AKZ 2.5 K	0695960000	100	AKZ 4 T	0445860000	100	AKZ 4 T	0344160000	100				AKZ 4 ST	0439260000	100
AKZ 2.5 K	0695660000	100	AKZ 2.5 K	0696160000	100				AKZ 4 T	0344060000	100						
												AKZ 4 T	0366460000	100			
												AKZ 4 T	0461660000	100			
AP (2.5)	0697260000	50	AP (2.5)	0697260000	50	AP (1.5)	0294460000	20	AP (1.5)	0294460000	20	AP (1.5)	0294460000	20	AP (1.5)	0294460000	20
TW (1.5)	0318560000	20	TW (1.5)	0318560000	20	TW (1.5)	0348260000	50	TW (1.5)	0348260000	50	TW (1.5)	0348260000	50	TW (1.5)	0348260000	50
						TSch 4	0363360000	100	TSch 4	0363360000	100	TSch 4	0363360000	100			
Q 2	0368200000	50	Q 2	0368200000	50	Q 2	0336400000	50	Q 2	0336400000	50	Q 2	0336400000	50	Q 2	0369000000	50
Q 3	0368300000	50	Q 3	0368300000	50	Q 3	0336500000	50	Q 3	0336500000	50	Q 3	0336500000	50	Q 3	0369100000	50
Q 4	0368400000	50	Q 4	0368400000	50	Q 4	0336600000	50	Q 4	0336600000	50	Q 4	0336600000	50	Q 4	0369200000	50
Q 10	0368500000	20	Q 10	0368500000	20	Q 10	0368600000	20	Q 10	0368600000	20	Q 10	0368600000	20	Q 10	0369300000	20
						VL 2	0446700000	50	VL 2	0446700000	50	VL 2	0446700000	50			
						VH 10	0446600000	50	VH 10	0446600000	50	VH 10	0446600000	50			
						BSM 2.5x14	0266800000	100	BSM 2.5x14	0266800000	100	BSM 2.5x14	0266800000	100			
StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50
PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20
DEK 5	see "Accessories"		DEK 5	see "Accessories"		DEK 6	see "Accessories"		DEK 6	see "Accessories"		DEK 6	see "Accessories"		DEK 6	see "Accessories"	

SAK-series

Feed-through terminals for TS 15

for temperature measuring circuits


AKZ 4/TC



Weidmüller's thermocouple terminals are specially designed for transmitting the smallest voltages in temperature measuring circuits. Special busbars ensure that no false signals occur in the terminal when temperature differences exist in the positive and negative path. This high measuring precision is necessary for, e.g. test beds for aircraft engines, for complicated chemical processes, control systems, etc.

- Busbar material corresponds to thermal and compensating conductors
- Clear thermocouple marking
- 2-pole blocks per thermocouple
- Row width 14 mm, incl. end plate

Configuration of a temperature measuring circuit



- | | |
|--------------------------|-----------------------------------|
| 1 Thermocouple (sensor) | 4 Reference point |
| 2 Thermocouple terminals | 5 Supply conductors (to and from) |
| 3 Compensating conductor | 6 Measuring device |

The thermocouple terminals displayed in this measurement circuit are used to thermo-electrically transmit thermal e.m.f. of the thermocouple to the reference point and indicating device. Thermocouple terminals are required for the construction of temperature measuring circuits.

Dimensions		
Width/length/height (mm)	with TS 15	14/27/30
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6
Rated data		
Rated voltage/current/cross-section		-/4 mm ²
Further technical data		
Tightening torque range	Nm	0.5...1
Torque setting with electric screwdriver type DMS 2		2
Clampable conductor		
Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	1.5...4
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...2.5
Plug gauge acc. to IEC 60 947-1	Size	A 3
Continuous current of terminal for conductor size		
Continuous current rating of cross-connection 2-pole	A	
Continuous current rating of cross-connection multipole	A	
Ordering data		
Version		TS 15
for thermocouples	Type J	Cat. No.
Acc. to IEC 584	Type T	Fe - CuNi
(DIN 43710)	Type K	Cu - CuNi
	Type E	NiCr - Ni
		NiCr - CuNi
		Qty.
		1627010000 20
		on demand
		1677130000 20
		on demand

End plate		Cat. No.	Qty.
AP (thickness 1.5 mm)	PA	0294460000	20
Partition		Cat. No.	Qty.
TW (thickness 0.5 mm)	PA	0348260000	50

Thermocouple, type J	
Thermocouple acc. to IEC 584 (DIN 43 710)	Busbar
	Constantan (CuNi)
	Iron (Fe)



Marking tags		Print
1	2	Material VO
3	4	DEK 5/6
5	6	1789590000 500

Mounting rails, end brackets, further marking material see "Accessories"

Multipole terminal blocks




Screw connection

MK 2/12

MK 10/14

MK 3/12

MK 4/16

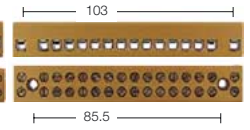

Dimensions/approvals

Width/length/height (mm)

UL CE

86/15/15

UL CE

88.5/13.5/12

UL CE

110/15/16.1

UL CE

103/17/16

Insulation stripping length/clamping screw/screwdriver blade

5 mm/M 2.5/3.5 x 0.6

6 mm/M 2.5/3.5 x 0.6

5 mm/M 2.5/3.5 x 0.6

5 mm/M 2.5/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section

125 V/24 A/2.5 mm²

125 V/24 A/2.5 mm²

400 V/24 A/2.5 mm²

400 V/24 A/2.5 mm²

Rated impulse voltage VDE 0110/1.89/pollution severity

2.5 kV/3

2.5 kV/3

6 kV/3

6 kV/3

Further technical data

Tightening torque range

Nm

0.4...0.45

0.4...0.45

0.4...0.45

0.4...0.45

Torque setting with electric screwdriver type DMS 2

1

1

1

1

Clampable conductor

Solid H07V-U

mm²

0.5...4

0.5...4

0.5...4

0.5...4

Stranded H07V-R

mm²

1.5...2.5

1.5...2.5

1.5...2.5

1.5...2.5

Flexible H07V-K

mm²

0.5...2.5

0.5...2.5

0.5...2.5

0.5...2.5

Flexible H07V-K and ferrule DIN 46 228/1

mm²

0.5...1.5

0.5...1.5

0.5...1.5

0.5...1.5

Flexible H07V-K and ferrule with plastic insul. collar

mm²

0.5...1.5

0.5...1.5

0.5...1.5

0.5...1.5

Max. clamping range in mm²/plug gauge acc. to IEC 60 947-1

Size 0.2...4.0 / A 2

0.2...4.0 / A 2

0.2...4.0 / A 2

0.2...4.0 / A 2

Continuous current rating of cross-connection 2-pole

A

Continuous current rating of cross-connection multipole

A

Rated data according to UL/CSA

Voltage/current/conductor size

UL

300 V/10 A/24...12 AWG

150 V/25 A/22...12 AWG

300 V/25 A/22...12 AWG

150 V/20 A/22...12 AWG

Voltage/current/conductor size

CSA

300 V/10 A/24...12 AWG

300 V/10 A/24...12 AWG

300 V/25 A/22...12 AWG

150 V/15 A/22...12 AWG

Ordering data

Version

Type Cat. No. Qty.

Type Cat. No. Qty.

Type Cat. No. Qty.

Type Cat. No. Qty.

2-pole

3-pole

4-pole

4-pole

6-pole

6-pole

8-pole

8-pole

10-pole

12-pole MK 2/12 PA 0241260000 50

12-pole

14-pole

16-pole

MK 10/14 PA 0370160000 20

other numbers on request





MK 3/6 KrG 0274220000 50

MK 3/8 KrG 0274420000 25

MK 3/10 KrG 0274620000 20

MK 3/12 KrG 0243520000 20

MK 4/16 KrG 0244220000 20



The MK 10/14 can be mounted with glue or with M 3 x 12* screws through the empty terminal point aperture

*DIN EN ISO 1207

Soldering strip/expansion rivet

MF 2/12 0241760000 50

SN 0200100000 500

Marking strips

printed

BSTb 28/12 0245700000 50

1 ... bottom

BSTb 28/8 0290200000 50

BSTb 28/6 0290000000 50

BSTb 28/4 0289800000 50

top

unprinted

BSTo 28/12 0245600000 50

BSTb 28/16 0262200000 50

BSTb 28/8 0290200000 50

BSTb 28/6 0290000000 50

BSTb 28/4 0289800000 50

BSTo 28/12 0245800000 50

BSTo 28/8 0284700000 50

BSTo 28/6 0289500000 50

BSTo 28/4 0289300000 50

BSTb 28/16 0262200000 50

bottom

BSTb 28/16 0278700000 50

top

BSTo 28/16 0262100000 50

Printed on top on request

Multipole terminal blocks


Screw/tab connection

MK 5/2

KS 2...10

BK 2...12

MK 6/2...6/6



Dimensions/approvals

Width/length/height (mm)	40/18/15.5	see table below	see table below	see table below
--------------------------	------------	-----------------	-----------------	-----------------

Insulation stripping length/clamping screw/screwdriver blade	5 mm/M 2.5/3.5 x 0.6	8 mm/M 3/4.0 x 0.8	8 mm/M 3/4.0 x 0.8	9 mm/M 4/4.0 x 0.8
--	----------------------	--------------------	--------------------	--------------------

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	500 V/24 A/2.5 mm ²	500 V/24 A/2.5 mm ²	400 V/32 A/4 mm ²	690 V/41 A/6 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	6 kV/3	6 kV/3	6 kV/3	8 kV/3

Further technical data

Tightening torque range	Nm 0.4...0.45	0.5...0.7	0.5...0.7	1.2...2.0
Torque setting with electric screwdriver type DMS 2	1	2	2	4

Clampable conductor

Solid H07V-U	mm ² 0.5...4	0.5...4	0.5...4	0.5...6
Stranded H07V-R	mm ² 1.5...2.5	1.5...2.5	1.5...4	1.5...6
Flexible H07V-K	mm ² 0.5...2.5	0.5...2.5	0.5...4	0.5...6
Flexible H07V-K and ferrule DIN 46 228/1	mm ² 0.5...1.5	0.5...1.5	0.5...4	0.5...4
Flexible H07V-K and ferrule with plastic insul. collar	mm ² 0.5...1.5	0.5...1.2	0.5...4	0.5...4
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size	0.2...4.0 / A 2	0.2...4.0 / A 2	0.33...4.0 / A 3	0.33...6.0 / A 3

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/20 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/30 A/22...10 AWG
Voltage/current/conductor size	CSA	300 V/25 A/24...12 AWG	300 V/10 A/22...12 AWG	300 V/40 A/22...10 AWG

Ordering data

Versions


Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
2-pole	MK 5/2 KrG	0243820000	100	KS 2 KrG ²⁾	0134420000	100	BK 2 KrG	0624720000	50	MK 6/2 KrG	0620420000	50
3-pole				KS 4 KrG ²⁾	0140320000	50	BK 3 KrG	0624920000	50	MK 6/3 KrG	0620320000	50
4-pole							BK 4 KrG	0625120000	50	MK 6/4 KrG	0620220000	20
4-pole												
6-pole				KS 6 KrG ²⁾	0140620000	50	BK 6 KrG	0625220000	50	MK 6/6 KrG	0620120000	20
6-pole												
8-pole												
8-pole												
10-pole				KS 10 KrG ²⁾	0141620000	20						
12-pole	Cover			Cover			BK 12 KrG	0625320000	50			
12-pole	D2 (for MK 5/2)	0244060000	50	D2 (for KS 2)	0134500000	100						
				D4 (for KS 4)	0140500000	50						
				D6 (for KS 6)	0140800000	50						
				D10 (for KS 10)	0141800000	20						




Cover D 2
(for MK 5/2)




Cover D 4
(for KS 4)



Cover




Marking tag cover



Dimensions

Type	a	b
BK 2	20	-
BK 3	31	11
BK 4	38	18
BK 6	52	32
BK 12	92	72.5



Dimens. Length/attach. dim.

Type	KRG
MK 6/2	23.5
MK 6/3	36.5
MK 6/4	49.5
MK 6/6	75.5

Expansion rivet

--	--	--	--	--

Marking strips

printed	1 ...	ELSo 2	0142800000	50	BSTb 28/2	0203600000	50	BSTb 17/6	0304600000	50
		ELSo 4	0142900000	50	BSTb 28/3	0203800000	50			
		ELSo 6	0143000000	50	BSTb 28/4	0197300000	50			
		ELSo 10	0143500000	50	BSTb 28/6	0197500000	50			
					BSTb 28/12	0198800000	50			
unprinted		ELSo 2	0142800000	50	BSTo 28/2	0203500000	50			
		ELSo 4	0142900000	50	BSTo 28/3	0203700000	50			
		ELSo 6	0143000000	50	BSTo 28/4	0197200000	50			
		ELSo 10	0143100000	50	BSTo 28/6	0197400000	50			
					BSTo 28/12	0198700000	50			


Mounting rails, end brackets, further marking material see "Accessories"

1) Projecting length = 1 mm. To be considered for the last terminal in a row!
Printed on top on request

2) Please order cover and marking strips separately.

Multipole terminal blocks

MF 1/6...1/12




UL

see below

SLS 2/2



SLS 2/4



UL

see below

Max. technical data

Dimensions/approvals

Width/length/height (mm)

Insulation stripping length/clamping screw/screwdriver blade

Rated data according to IEC 60 947-7-1

Rated voltage²⁾/current/cross-section

Rated impulse voltage VDE 0110/1.89/pollution severity

Further technical data

Tightening torque range

Nm

Torque setting with electric screwdriver type DMS 2

Clampable conductor

Solid H07V-U

mm²

Stranded H07V-R

mm²

Flexible H07V-K

mm²

Flexible H07V-K and ferrule DIN 46 228/1

mm²

Flexible H07V-K and ferrule with plastic insul. collar

mm²

Max. clamping range in mm²/plug gauge acc. to IEC 60 947-1 Size

Rated data according to UL/CSA

Voltage/current/conductor size

UL

Voltage/current/conductor size

CSA

Ordering data

PA

300 V/10 A/24...12 AWG

300 V/10 A/22...10 AWG

Type Cat. No. Qty.

MF 1/6 KrG²⁾ **0479720000** 100

MF 1/6 KrG³⁾ **0480020000** 100

MF 1/8 KrG²⁾ **0479820000** 50

MF 1/8 KrG³⁾ **0480120000** 50

MF 1/12 KrG²⁾ **0479920000** 50

MF 1/12 KrG³⁾ **0480220000** 50

8 mm/M 3.5/4.0 x 0.8

400 V²⁾/16 A/4 mm²

6 kV/3

0.8...1.6

3

0.5...4

1.5...4

0.5...4

0.5...4

0.5...4

0.33...4.0 / A 3

300 V/10 A/22...10 AWG

300 V/10 A/22...10 AWG



Type Cat. No. Qty.

SLS 2/2 KrG **0213420000** 100

SLS 2/4 KrG **0240420000** 50


SLS 2/4 KrG **0480320000** 50

Slotted



Dimensions

Type	a	b	c	d
MF 1/6	52	34	9.5	6.5
MF 1/8	68	50	9.5	6.5
MF 1/12	113 ^{+0.5}	102	8	7.5



Expansion rivet/insulation sleeve

IH

IH 2.8 **0386060000** 100

IH 6.3 **0386260000** 100

SN **0200100000** 500

IH 2.8 **0386060000** 100

IH 6.3 **0386260000** 100

Cover/marking strips

BSTb 10/6 **0240900000** 50

BSTb 10/8 **0241100000** 50

BSTb 10/12 **0209500000** 50

BSTo 10/6 **0240800000** 50

BSTo 10/8 **0241000000** 50

BSTo 10/12 **0209400000** 100

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ Insulation sleeves are to be used for tab connections to maintain the rated voltage.

²⁾ Single tab
³⁾ Double tab

Multipole terminal blocks





Screw, solder, tab connection

MKL 2/12

MF 2/12

MKL 3/12

MKL 4/16



Dimensions/approvals		MKL 2/12			MF 2/12			MKL 3/12			MKL 4/16				
Width/length/height (mm)		88/23/15			75/24/6			110/23/16			103/24/16.5				
Insulation stripping length/clamping screw/screwdriver blade		5 mm/M 2.5/3.5 x 0.6			5 mm			5mm/M 2.5/3.5 x 0.6			5mm/M 2.5/3.5 x 0.6				
Rated data															
Rated voltage*/current/cross-section		125 V/20 A/2.5/1.5/1 mm ²			63 V/17.5 A/1.5/1 mm ²			400 V*/20 A/2.5/1.5/1 mm ²			400 V/20 A/2.5/1.5/1 mm ²				
Rated impulse voltage VDE 0110/1.89/pollution severity		2.5 kV/3			1.5 kV/3			6 kV/3			6 kV/3				
Further technical data															
Tightening torque range		Nm 0.4...0.45						0.4...0.45			0.4...0.45				
Torque setting with electric screwdriver type DMS 2		1						1			1				
Clampable conductor															
Solid H07V-U		mm ² 0.5...2.5						0.5...4			0.5...4				
Stranded H07V-R		mm ² 1.5...2.5						1.5...2.5			1.5...2.5				
Flexible H07V-K		mm ² 0.5...2.5						0.5...2.5			0.5...2.5				
Flexible H07V-K and ferrule DIN 46 228/1		mm ² 0.5...2.5						0.5...1.5			0.5...1.5				
Flexible H07V-K and ferrule with plastic insul. collar		mm ² 0.5...2.5						0.5...1.5			0.5...1.5				
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size		0.2...2.5 / A 2						0.33...4.0 / A 2			0.33...4.0 / A 2				
Rated data according to UL/CSA															
Voltage/current/conductor size		UL						300 V/25 A/22...12 AWG			300 V/25 A/22...12 AWG				
Voltage/current/conductor size		CSA						300 V/25 A/22...12 AWG			150 V/15 A/22...12 AWG				
Ordering data		Versions		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
Horizontal		2-pole								MKL 3/2 KrG	0274920000**	100			
Other number of poles on demand		4-pole								MKL 3/4 KrG	0275120000**	100			
		6-pole								MKL 3/6 KrG	0275320000**	50			
		12-pole		MKL 2/12 PA	0241360000	50				MKL 3/12 KrG	0243620000**	20			
		16-pole											MKL 4/16 KrG	0262020000	20
Vertical		2-pole								MKL 3/2 KrG	0276020000*	100			
Other number of poles on demand		4-pole													
		6-pole								MKL 3/6 KrG	0276420000*	50			
		12-pole								MKL 3/12 KrG	0249920000*	20			
		16-pole											MKL 4/16 KrG	0244320000	20
		double-sided 2.8 x 0.8					MF 2/12 PA	0241860000	50						
		single-sided 0.8 x 1.6/2.8 x 0.8					MF 2/12 PA	0241760000	50						

* For terminals directly mounted next to each other, the rated voltage is reduced to 250 V.

** Rated voltage 250 V. For terminals directly mounted next to each other, the rated voltage is reduced to 125 V.

Expansion rivet/insulation sleeve		MKL 2/12			MF 2/12			MKL 3/12			MKL 4/16		
IH		SN 0200100000 500			IH 2.8 0386060000 100								
Marking strips													
printed		BSTb 28/12 0245700000 50						BSTb 28/4 0289800000 50			BSTb 28/16 0262200000 50		
1 ...		bottom						BSTb 28/6 0290000000 50			bottom		
		top 0278500000 50						BSTb 28/12 0245900000 50			top		
unprinted		BSTo 28/12 0245600000 50						BSTo 28/4 0289300000 50			BSTo 28/16 0262100000 50		
								BSTo 28/6 0289500000 50					
								BSTo 28/12 0245800000 50					

Mounting rails, end brackets, further marking material see "Accessories"


* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

1) Rated voltage 250 V


Multipole terminal blocks

Screw, solder, tab
connection
Modular design

AKB 4



AKZ 2.5



ASK 1



Max. technical data

Dimensions/approvals	AKB 4	AKZ 2.5	ASK 1
Width/length/height (mm)	6/27/23	5/25.5/26.5	8/58/30.5
Insulation stripping length/clamping screw/screwdriver blade	9 mm/M 3/3.5 x 0.6	7 mm/M 2.5/3 x 0.5	9 mm/M 3/3.5 x 0.6
Rated data according to IEC 60 947-7-1			
Rated voltage/current/cross-section	400 V/32 A/4 mm ²	250 V/24 A/2.5 mm ²	500 V/6.3 A/4 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity	6 kV/3	4 kV/3	6 kV/3
Further technical data			
Tightening torque range Nm	0.5...1.0	0.4...0.6	0.5...1.0
Torque setting with electric screwdriver type DMS 2	2	1	2
Clampable conductor			
Solid H07V-U mm ²	0.5...6	0.5...4	0.5...4
Stranded H07V-R mm ²	1.5...4	1.5...2.5	1.5...4
Flexible H07V-K mm ²	0.5...4	0.5...2.5	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1 mm ²	0.5...4	0.5...2.5	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar mm ²	0.5...4	0.5...2.5	0.5...2.5
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size	0.33...4.0 / A3	0.13...4.0 / A3	0.13...4.0 / A3
Continuous current rating of cross-connection 2-pole A	32	24	(QB 2...4) 10
Continuous current rating of cross-connection multipole A	32	24	
Rated data according to UL/CSA			
Voltage/current/conductor size UL	300/250 V/27 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG
Voltage/current/conductor size CSA	300 V/10 A/22...12 AWG	300 V/10 A/26...10 AWG	300 V/6.3 A/26...12 AWG
Ordering data			
	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
PA	AKB 4 PA 0321560000 100	AKZ 2.5 0697160000 100	ASK 1 PA 0376960000 100
Blue PA	0321580000 100	AKZ 2.5 0697180000 100	
	Direct mounting with BB 1 please order separately	Direct mounting with BB 4 please order separately	(for G fuse inserts 5x 20 without indicator)
End plate/attachment bracket (thickness mm)			
AP	BB 1 (7) 0320560000 50	BB 4 (7.5) 0697560000 50	
Blue PA	BS M 3 x 15 0359000000 100		
		AP (2.5) 0697360000 50	AP (1.5) 0380360000 20
		AP (2.5) 0697380000 50	
Partition (thickness mm)			
	TW PA (0.5) 0348260000 50		
Small partition			
	TSch 4 0363360000 100		
Cross-connection			
Q 3 QB 4	Q 2 0336400000 50	Q 2 0368200000 50	QB 2 ¹⁾ 0461100000 50
	Q 3 0336500000 50	Q 3 0368300000 50	QB 3 ¹⁾ 0461200000 50
	Q 4 0336600000 50	Q 4 0368400000 50	QB 4 ¹⁾ 0461300000 50
	Q 10 0368600000 20	Q 10 0368500000 20	
Switchable cross-connection link			
VL BS VH	VL 2 0446700000 50		
	VH 10 0446600000 50		
	BS M 2.5x14 0266800000 100		
Test plug/socket			
PS StB	StB 8.5 0215700000 50	StB 8.5 0215700000 50	
	PS 2.3 0180400000 20	PS 2.3 0180400000 20	
Cover/contact sleeve			
K sleeve	AD 4 0303400000 50		
	BSKM2.5x18 0303300000 100		K sleeve 0553300000 100
Marking tags			
DEK Standard	DEK 6 see "Accessories"	DEK 5 see "Accessories"	DEK 6.5 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"			

¹⁾ The conductor cross-section is reduced to max. 2.5 mm² when QB is used.

* With contact sleeve 19 A

Feed-through terminals

Screw connection
Solder connection
Tab connection
Spring-clip connection
 acc. to DIN 41 611 Part 4
Wrap connection
 acc. to DIN/IEC 352 Part 1

AKA 2.5



ADK 1



ADK 1 F ADK 3 F



ADK 1 S



Dimensions/approvals		UL ®	UL ®	UL ®	UL ®									
Width/length/height with Pins (mm)		6/20/31	6/22/36.5	6/22/36.5	6/22/36.5									
Length solder tag/pin (mm)		7,8	8,4	8,5/7,5	8,4									
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 2.5/3.5 x 0.6	9 mm/M 3.5/3.5 x 0.6	11 mm/M 2.5/3.5 x 0.6	-									
Rated data														
Rated voltage*/current/cross-section		400 V/20 A/2.5/1.5 mm ²	400 V/16 A/4/1.5 mm ²	400 V/20 A/2.5/1.5 mm ²	400 V/16 A/2.5/1.5/1 mm ²									
Rated impulse voltage VDE 0110/1.89/pollution severity		6 kV/3	6 kV/3	6 kV/3	6 kV/3									
Further technical data														
Tightening torque range	Nm	0.4	0.5...1.0	0.4...0.6	-									
Torque setting with electric screwdriver type DMS 2		1	2	1	-									
Clampable conductor														
Solid H07V-U	mm ²	0.5...2.5	0.5...4	0.5...2.5										
Stranded H07V-R	mm ²	1.5...2.5	1.5...4	1.5...2.5										
Flexible H07V-K	mm ²	0.5...2.5	0.5...4	0.5...2.5										
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...1.5	0.5...2.5	0.5...1.5										
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...1.5	0.5...2.5	0.5...1.5										
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1	Size	0.13...2.5 / A2	0.13...2.5 / A3	0.13...2.5 / A2	0.5...2.5 / -									
Continuous current rating of cross-connection 2-pole	A													
Continuous current rating of cross-connection multipole	A	10	10											
Rated data according to UL/CSA														
Voltage/current/conductor size	UL	300 V/20 A/26...12 AWG	300 V/10 A/26...12 AWG	300 V/20 A/26...14 AWG	300 V/18 A/12 AWG max.									
Voltage/current/conductor size	CSA	300 V/10 A/24...12 AWG	300 V/15 A/26...12 AWG	300 V/15 A/22...14 AWG	300 V/3 A/-									
Ordering data		Version	for plate thckn. mm	Cat. No.	1.5 Qty.	2.5 Qty.	1.5 Qty.	2.5 Qty.	1.5 Qty.	2.5 Qty.	2.5 Qty.			
		PA		0300720000	100									
		KrG												
		Pin 1.0x1.0												
		Pin 0.8x1.6												
		FS 1x6.3 slotted/0.8x2.8									0476160000 100 0478560000 100			
		12-pole PA												
End plate (thickness mm)		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
		KrG	AP (3)	0162520000	100									
		PA				AP (3)	0476260000	50	AP (3)	0476260000	50	AP (3)	0476260000	50
		EP							AP (3)	0360000000	20			
Spacer (thickness mm)														
		KrG	ZP (1.5)	0240720000	50									
		KrG	ZP (2.5)	0288520000	20									
Partition (thickness mm)														
						TW (0.5)	0442300000	50	TW (0.5)	0442300000	50	TW (0.5)	0442300000	50
Test plug/socket														
		StB	Plug test socket ø 2.3			PS 2.3	0180400000	20						
		PS												
Fuse pin/insulation sleeve/expansion rivet														
			SST 1.2	0306600000										
						SST 1.2	0306600000		SST 1.2	0306600000		SST 1.2	030660	
						IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100
												IH 6.3	0386260000	100
Marking tags														
		Print												
		DEK	Standard	DEK 6	see "Accessories"	DEK 6	see "Accessories"		DEK 6	see "Accessories"		DEK 6	see "Accessories"	
Mounting rails, end brackets, further marking material see "Accessories"														

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

Feed-through terminals

ADK 1 T



6/22/50.5
19.5...21.9
9 mm/M 3/3.5 x 0.6
400 V/8 A/4 mm ²
6 kV/3
0.5...1.0
2
0.5...4
1.5...4
0.5...4
0.5...2.5
0.5...2.5
0.13...4.0 / A3
10
300/250 V/10 A/26...12 AWG
300 V/15 A/26...12 AWG
1.5 Qty. 2.5 Qty.
0372260000 100
0366360000 100

Type	Cat. No.	Qty.
AP (3)	0476260000	50


TW (0.5)	0442300000	50
----------	-------------------	----

PS 2.3	0180400000	20
--------	-------------------	----

SST 1.2	0306600000	
---------	-------------------	--

DEK 6	see "Accessories"	
-------	-------------------	--

AKZ 2.5 K

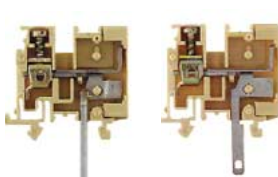

0109160000 solder tag

5/26/45.5
22.4...23.6
7 mm/M 2.5/3.0 x 0.5
250 V/8 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...2.5
0.5...2.5
0.13...2.5 / A2
10
300/250 V/10 A/22...12 AWG
300 V/10 A/26...10 AWG
Cat. No. Qty.
0109160000 solder tag 100
0108960000 100

Type	Cat. No.	Qty.
AP (3)	0697260000	50

TW (1.5)	0318560000	20
----------	-------------------	----

PS 2.3	0180400000	20
StB 8.5	0215700000	50

IH 2.8	0386060000	100
--------	-------------------	-----

DEK 5	see "Accessories"	
-------	-------------------	--

ADK 1 FT



6/22/52
24
11 mm/M 2.5/3.5 x 0.6
250 V/10 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...1.5
0.5...1.5
0.33...2.5 / A2
10
300 V/3 A/22...14 AWG
Cat. No. 1.5 Qty.
0176960000 100


Type	Cat. No.	Qty.
AP (3)	0476260000	50

TW (0.5)	0442300000	50
----------	-------------------	----

SST 1.2	0306600000	
---------	-------------------	--

DEK 6	see "Accessories"	
-------	-------------------	--

MK 2/12



86/15/23
8
5
63 V/20 A/2.5/1.5 mm ²
1.5 kV/3
0.4...0.45
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...2.5
0.5...2.5
0.2...2.5 / A2
10
300 V/10 A/24...12 AWG
300 V/10 A/24...12 AWG
Cat. No. Qty.
0241460000 50

Type	Cat. No.	Qty.
AP (3)	0476260000	50

TW (0.5)	0442300000	50
----------	-------------------	----

SN	0200100000	500
----	-------------------	-----

BSTb 28/12	024570...	50
BSTo 28/12	024560...	50

Rack-mounted interface systems

TOP 1.5 F/32




SP 10 FF²⁾ SP 10 LF³⁾



SP 60 FF²⁾ SP 60 LF³⁾



SP 90 FF²⁾ SP 90 LF³⁾



Dimensions		TOP 1.5 F/32	SP 10 FF ²⁾ SP 10 LF ³⁾	SP 60 FF ²⁾ SP 60 LF ³⁾	SP 90 FF ²⁾ SP 90 LF ³⁾									
Width/length/height (mm)		40.2/110.6/29.5	42/46.5/170/28	40/45.5/162.5/110	40/45.5/228.5/110									
Hole spacing/mounting dimensions	mm	101.6/20.3	147	151/90	217/90									
Insulation stripping length/clamping screw/screwdriver blade		10 mm/M 2.5/3.5 x 0.6												
Rated data														
Rated voltage*/current/cross-section		250* V/6 A/1.5/1 mm ²	1000* V/16 A/2.5/1.5 mm ²	400* V/16 A/2.5/1.5 mm ²	400* V/16 A/2.5/1.5 mm ²									
Rated impulse voltage VDE 0110/1.89/pollution severity		4 kV/3	6 kV/3	6 kV/3	6 kV/3									
Further technical data														
Tightening torque range	Nm	0.4...0.7												
Torque setting with electric screwdriver type DMS 2		1												
Clampable conductor														
Solid H07V-U	mm ²	0.5...2.5												
Stranded H07V-R	mm ²	1.5												
Flexible H07V-K	mm ²	0.5...1.5												
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...1.5												
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...1.5												
Plug gauge acc. to IEC 60 947-1	Size	A1												
Ordering data		Version	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
Pin 1.0 x 1.0		PA	TOP 1.5 F/32	0443160000 ¹⁾	5									
Pin 0.8 x 2.8 (push-on), unprinted		PA												
Pin 0.8 x 2.8 (push-on), printed, 1...32		PA												
Pin 0.8 x 2.8 (push-on), printed, 1...32, blue		PA												
6 x plug (6.3 x 0.8)		KrG				SP 10 FF	0456220000	10	SP 60 FF ⁴⁾	0340320000	1	SP 90 FF**	0248120000	1
6 x plug (6.3 x 0.8), blue		KrG							SP 60 FF ⁴⁾	0340370000	1			
6 x plug (6.3 x 0.8), bzw. 12 x 2.8 x 0.8 slotted		KrG										SP 90 FF**	0608920000	1
6 x plug (6.3 x 0.8), bzw. 12 x 2.8 x 0.8 slotted, blue		KrG												
3 x plug (6.3 x 0.8) / 1 x solder per pole		KrG							SP 60 LF ⁴⁾	0343720000	1	SP 90 LF**	0248220000	1
3 x plug (6.3 x 0.8) / 1 x solder per pole, blue		KrG							SP 60 LF ⁴⁾	0343770000	1			
3 x plug (6.3 x 0.8 bzw. 6 x 2.8 x 0.8) / 1 x solder		KrG							SP 60 LF ⁵⁾	0124520000	1			
3 x plug (6.3 x 0.8 bzw. 6 x 2.8 x 0.8) / 1 x solder, blue		KrG							SP 60 LF ⁵⁾	0124570000	1			
2 x direct connection, 1 x Pin 0.8 x 1.6		PA										printed:		
												** A...F / 1...15		
									printed:					
									⁴⁾ A...F / 1...10					
									⁵⁾ 00...50 / 1...10					
Insulation sleeves		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
		IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100	
					IH 6.3	0386260000	100	IH 6.3	0386260000	100	IH 6.3	0386260000	100	
Marking tags		Print												
dekafix		for group markers			FW 5	see "Accessories"								
Mounting rails, end brackets, further marking material see "Accessories"														

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

¹⁾ Rated voltage 125 V

²⁾ FF = Tab - Tab
³⁾ LF = Solder - Tab

Rack-mounted interface systems


RV 8/8 long



RV 8/8 short



RV 8/9 long



RV 8/9 short



Technical data acc. to VDE

Pin versions (intern)

0.8 x 2.4/1 x 1

0.8 x 2.4/0.8 x 2.4

Plug adapter



1-pole

for connection of solid and flexible conductors from 0.75 to 1.5 mm² directly on to the pins of the interface system.


125 V/-/-			125 V/-/-		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0468860000	1		0467160000	1
	0468960000	1		0467260000	1
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
DSA 1	0576060000	50	DSA 1	0576060000	50

105 V/-/-			125 V/-/-		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0498960000	1		0444060000	1
	0499060000	1		0545960000	1
with shield pins			with shield pins		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
DSA 1	0576060000	50	DSA 1	0576060000	50

RV 8/20 short



RV 8/56 short

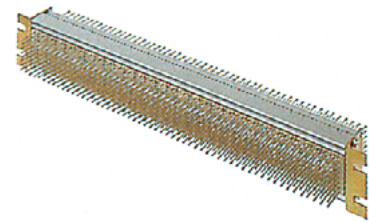

Technical data acc. to VDE

Pin versions (internal)


0.8 x 2.4/1 x 1

0.8 x 2.4/0.8 x 2.4

Additional versions on request

125 V/-/-		
Cat. No.	Qty.	
0544460000	1	

125 V/-/-		
Cat. No.	Qty.	
0462260000	1	
0533060000	4	

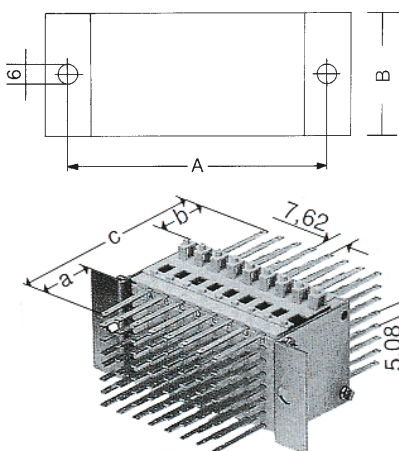

Type	Size A		Size B	
	in mm		in mm	
RV 8/8 K	81	40.64		
RV 8/9 K	89	40.64		
RV 8/8 L	93	40.64		
RV 8/9 L	100	40.64		
RV 8/20 K	187,62/31.5	63		
RV 8/56 K	460/31.5	63		

(K = short/L = long)

Cat. No.	RV	a	b	c
0468860000	8/8 L	26	20	200
0468960000	8/8 L	26	26	206
0467160000	8/8 K	26	20	84
0467260000	8/8 K	26	26	89
0119360000	8/20 K	26	20	84
0544460000	8/20 K	26	26	89
0462260000	8/56 K	26	20	84
0533060000	8/56 K	26	26	89

Mounting rails, end brackets, further marking material see "Accessories"

SAK-series