

**RMME 11/24 with ground bridge input relay IN: 24 VAC/DC - OUT: 125 VAC/DC / 1 A**

1 relay; 1 N/O contact  
24 V AC/DC  
with minus plug link  
Screw terminals

**Image**

Vicarious picture

**Switching capacity (EN 60947-5-1)**

AC-15	1 A (24 V DC); 0.5 A (125 V AC)
DC-13	1 A (24 V DC); 0.5 A (125 V AC)

**Input**

Input voltage	24 V AC/DC $\pm 10\%$
Mounting power	6 mA
Plug link	Art.-No. 90960 (included)
LED display	LED (yellow)

**Output**

Switching voltage	max. 125 V AC/DC
Switching current	max. 1 A
Min. load current	1 mA
Breaking capacity (voltage dependent)	max. 60 VA/30 W
Switching frequency	max. 15 Hz
Contact material	Pd Ni-Au Rh
Energize/release/contact bounce time	10/10/1 ms

**General data**

Mech./ elect. life	$1 \times 10^8$ /load dependent
Test isolation voltage	1.5 kV
Temperature range	-20...+60 °C
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Dimensions H $\times$ W $\times$ D	56 x 12 x 64 mm


**Commercial data**

Net weight	28
Weight unit	gram
Basic unit	pc.
Customs tariff number	85364900
Unit (piece)	1
Limited value	1

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 12/12

## Circuit diagram

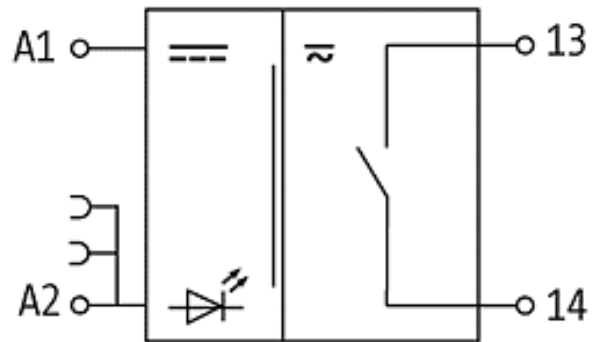

## Dimension drawing

